

Demolition of Structures Located at Storage Structure on 2nd Street, Yucaipa 12806 2nd Street, Yucaipa, 12816 2nd Street, Yucaipa 12834 2nd Street, Yucaipa

Proposal No. 210331

Issued on March 31, 2021

Response Due and Public Bid Opening Tuesday, April 27, 2021 at 2:00 p.m.

Yucaipa Valley Water District 12770 Second Street Yucaipa, California 92399

Contact Information: Matt Porras, Implementation Manager


Phone: (909) 790-3300 Email: mporras@yvwd.us

Table of Contents

| Introduction | Page 3 of 97 |
|---------------------------------------|---------------|
| Response Due Date | Page 4 of 97 |
| Project Description | Page 4 of 97 |
| General Obligations of Contractor | Page 5 of 97 |
| Scope of Work and Requirements | Page 6 of 97 |
| | |
| Appendix A - Standard Agreement | Page 13 of 97 |
| Appendix B - Bid Proposal | Page 20 of 97 |
| Appendix C - Additional Documentation | Page 22 of 97 |

Introduction

This Request for Proposals ("RFP") is being issued by the Yucaipa Valley Water District ("District") to solicit a cost for the demolition of residential structures located at 12806 2nd Street, Yucaipa (APN 0319-121-38); 12816 2nd Street, Yucaipa (APN 0319-121-39); and 12834 2nd Street, Yucaipa (APN 0319-121-63), and a steel storage facility with a concrete substructure located on 2nd Street. Demolition is defined as the demolition and removal of the building, removal of the basement and concrete foundation.

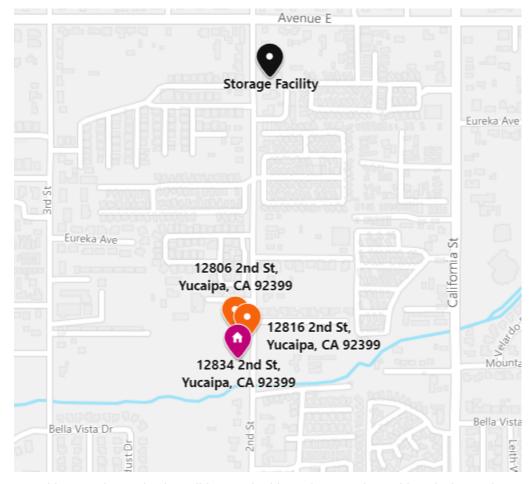

Contractors with experience in demolition and with an interest in making their services available to the District are invited to respond to this RFP. "Respondents" means the Contractors that submit proposals in response to this RFP. It is understood that the selected Respondent acting as an individual, partnership, corporation, or other legal entity, is licensed and capable of providing the specified services. The Respondent shall be financially solvent and each of its members if a joint venture, its employees, agents, or sub-consultants of any tier shall be competent to perform the services required under this RFP.

Nothing in this RFP shall be construed to create any legal obligation on the part of the District or any respondents. The District reserves the right, in its sole discretion, to amend, suspend, terminate, or reissue this RFP in whole or in part, at any stage.

In no event shall the District be liable to Respondents for any cost or damages incurred in connection with the RFP process, including but not limited to, any and all costs of preparing a response to this RFP or any other costs incurred in reliance on this RFP. No respondent shall be entitled to repayment from the District for any costs, expenses or fees related to this RFP. All

supporting documentation submitted in response to this RFP will become the property of the District and available for public review without limitations. Respondents may also withdraw their interest in the RFP, in writing, at any point in time as more information becomes known.

Pre-Bid Job Walk and Response Due Date

A non-mandatory pre-bid job walk will be conducted on April 6, 2021 at 9:00 am. The job walk will begin promptly at 9:00am starting from the District office located at 12770 Second Street, Yucaipa, California 92399.

Response Due Date: Tuesday, April 27, 2021 at 2:00 pm

Mailing Address and Yucaipa Valley Water District

Bid Opening Location: Attn: Matt Porras, Implementation Manager.

12770 Second Street Yucaipa, California 92399

Project Description

The Yucaipa Valley Water District ("District") owns an old storage facility that was once used as a water storage reservoir that consists of a sloped concrete structure with a steel roof structure. This property is located at approximately 12577 2nd Street (Assessor Parcel Number 0319-441-05). At this property, the demolition will involve the demolition and removal of all concrete, piping, and steel within the area delineated below.

Storage Facility - Imported fill material may be needed at the Storage Facility Site to avoid ponding after the demolition has been completed. The fill material shall be select soil material, non-expansive with an expansion index of less than 20, free of vegetative matter and other deleterious substances, granular with a Sand Equivalent (SE) greater than 30 and shall not contain rocks or other irreducible matter with a maximum dimension greater than 4". Fill material shall be approved by the Owner prior to use onsite and may be available from the other properties identified below.



<u>Three Residential Structures</u> - The Yucaipa Valley Water District ("District") owns three adjoining parcels: 12806 2nd Street (APN 0319-121-38), 12816 2nd Street (APN 0319-121-39), and 12834 2nd Street (APN 0319-121-63), Yucaipa. On these properties the demolition will involve the demolition and removal of all above ground house structures, concrete foundations, trees, bushes, fences, walls, and below ground utility services lines within the area delineated below.



General Obligations of Contractor

- 1. The selected Contractor will be required to sign the attached Standard Agreement in Appendix A. There will be no negotiation on the language of the attached Standard Agreement.
- 2. The Contractor shall be licensed by the California Contractors State License Board or other required agencies.
- 3. The Contractor and Subcontractor must be registered with the Department of Industrial Relations pursuant to Labor Code section 1725.5.
- 4. The Contractor shall perform all services as expeditiously as is consistent with skill and care and shall complete the services within each and all of the time periods.
- 5. The Contractor shall comply with the California Fair Employment and Housing Act and all other State, Federal and local laws including, but not limited to, those

- prohibiting discrimination, on account of race, color, national origin, sexual orientation, religion, age, marital status, gender, or disability.
- 6. The Contractor shall obtain all permits necessary to complete the Project at no additional cost.
- 7. The Contractor shall provide all supervision, labor, equipment, technical expertise, safety equipment, and service operations to complete the project. All work shall be performed under the supervision of a qualified superintendent of foreman.
- 8. The designated District Representative shall have sole authority to approve all phases of the project including the quality of work and shall not authorize payment until in his or her opinion the work has been satisfactorily completed.
- 9. The Contractor shall ensure that employees comply with all California State Industrial regulations and practices.
- 10. The Contractors' personnel shall conduct themselves in a professional manner at all times. Personnel shall be courteous, neat in appearance, and wear visible Contractor identification including all personal protection equipment. All equipment shall display their company identification, including any Subcontractors.
- 11. The Contractor shall ensure all Contractor personnel comply with all relevant OSHA, Cal/OSHA, and Labor and Industries work safety regulations at all times they are on the project site. Contractor is responsible for implementing confined space entry procedures in accordance with all relevant laws and regulations.

Scope of Work and Requirements

- 1. CONSTRUCTION PERIOD AND REQUIREMENT The Contractor shall return the fully executed agreement included herein to the District within 10 calendar days of the contract award date. Upon receiving the executed agreement, the District will issue a Notice to Proceed no later than May 17, 2021. The Contract Work shall be complete within 40 calendar days following the date of the District issued written Notice to Proceed. Contractor is advised that "Liquidated Damages" of \$250 per calendar day may be assessed for each calendar day that the Work remains incomplete following the date established by the Contract Completion Schedule, as adjusted for due cause by Change Order.
- 2. DEMOLITION SPECIFICATIONS The Scope of Work and Requirements includes the following:
 - a. Demolition and removal of buildings, basements, foundations, and vegetation within the identified Perimeter of Demolition and Removal.

3. DEFINITIONS

- a. Remove: Remove and legally dispose of items except those indicated to be reinstalled, salvaged, or to remain on the District's property.
- b. Existing to Remain: Protect items indicated to remain against damage during demolition if any.
- 4. MATERIALS OWNERSHIP: Except for items or materials indicated to be reused, salvaged, or otherwise indicated to remain the District's property, demolished

materials shall become the Contractor's property and shall be removed from the site with further disposition at the Contractor's option.

- 5. SUBMITTALS Submit each item for information only, unless otherwise indicated.
 - a. Schedule of demolition activities indicating the detailed sequence of demolition and removal work, with starting and ending dates for each activity.
 - b. Inventory of items to be removed and salvaged.
 - c. Landfill records.

PROJECT CONDITIONS

- a. The District will conduct a non-mandatory pre-bid job walk on April 6, 2021 at 9:00 am to allow potential bidders an opportunity to view the proposed work sites.
- b. Contractor is responsible to comply with any/all required demolition permits required by local authorities and ordinances.
- c. Buildings to be demolished will be vacated and their use discontinued before start of Work.
- d. Conditions existing at time of inspection for bidding purpose will be maintained by the District as far as practical.
- e. Storage or sale of removed items or materials on-site will not be permitted.
- f. Landfill Disposal Contractor shall supply District with a copy of landfill and disposal receipts.

7. EXAMINATION

- a. Survey existing conditions and correlate with requirements indicated to determine extent of demolition required.
- b. Survey the condition of the buildings to determine whether removing any element might result in a structural deficiency or unplanned collapse of any portion of the structure or adjacent structures during demolition.
- c. Perform surveys as the Work progress to detect hazards resulting from demolition activities.

8. PREPARATION

- a. Drain, purge, or otherwise remove, collect, and dispose of chemicals, gases, explosives, acids, flammables, or other dangerous materials before proceeding with demolition operations.
- b. Conduct demolition operations and remove debris to ensure minimum interference with roads, streets, walks, and other adjacent occupied and used facilities.
- c. Do not close or obstruct streets, walks, or other adjacent occupied or used facilities without permission from authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by governing regulations.
- d. Conduct demolition operations to prevent injury to people and damage to adjacent buildings and facilities to remain. Ensure safe passage of people around demolition area.
- e. Erect temporary protection such as walks, fences, railings, canopies, and covered passageways, where required by authorities having jurisdiction.

- f. Protect existing site improvements, appurtenances, and landscaping to remain.
- g. Use of explosives will not be permitted.
- h. Pollution Controls Under the authority of Section 112 of the Clean Air Act, as amended, 42 U.S. C. 1857 (C-7), the Administrator of the United States Environmental Protection Agency (EPA) promulgated National Emission Standards for Hazardous Air Pollutants on April 6, 1973, (38 F.R. 8820) Asbestos was designated a hazardous air pollutant, and standards were set for its use, and to control asbestos emissions. It was determined that one significant source of asbestos emissions was the demolition of certain buildings and structures.
- i. Recycled Water is available near Avenue E and 5th Street. Hauled recycled water will be required pursuant to the District's guidelines and requirements for grading and dust control. Use recycled water mist, temporary enclosures, and other suitable methods to limit the spread of dust and dirt. Comply with governing environmental protection regulations.
- j. Do not create hazardous or objectionable conditions, such as flooding and pollution when using water.
- k. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- Clean adjacent buildings and improvements of dust, dirt and debris caused by demolition operations. Return adjacent areas to condition existing before start of demolition.
- m. Contractor shall limit hours of operation to Monday through Friday during the hours of 8:00 am to 3:00 pm. Special hours of operation outside the normal hours must be approved by the District. Contractor shall limit noise pollution at all times to prevent objectionable conditions.

9. DEMOLITION

- a. Building Demolition: Demolish buildings, structures, facilities, and other debris including brush and trees or logs, and completely remove from the site. Use methods required to complete Work within limitations of governing regulations.
- b. Locate demolition equipment in and around buildings and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
- c. Dispose of demolished items and materials promptly. On-site storage or sale of removed items is prohibited.
- d. Break up and remove concrete slabs.
- e. Remove structural framing members to ground to avoid free fall and to prevent ground impact and dust generation.
- f. Below-Grade Construction: Demolish and remove all foundation walls and all below-grade construction.
- g. Basement Excavation Below grade structures foundation/basement floor shall be totally removed.
- h. Completely fill below-grade areas and voids resulting from demolition of buildings and removal of building basement and garage foundation with soil materials and

- sufficient compaction to ensure there is proper drainage and no ponding of water on the site for a minimum period of one year.
- Damages: Promptly repair damages to adjacent facilities caused by demolition operations.
- j. Special Conditions The Contractor shall preserve all surrounding buildings and property. Contractor should note the proximity of surrounding buildings. Any damage to surrounding buildings or property will be repaired by the Contractor at his expense.

10. DISPOSAL OF DEMOLISHED MATERIALS

- a. Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.
- b. Burning: Do not burn demolished materials.
- c. Transport demolished materials and legally dispose of them.
- 11. FILL MATERIAL AND COMPACTION Contractor to provide clean fill material where needed to achieve a consistent grade matching area not included within the Perimeter of Proposed Demolition such that there is no ponding, depressions, or swales. Contractor to provide a compaction report indicating that all fill areas for below-grade demolition results in a minimum 90% compaction for bottom, center, and top of filled areas at a location determined by the District staff.
- 12. MEASUREMENT AND PAYMENT The work of Building Demolition shall not be paid for separately but shall be included in the lump sum project cost payable within 30 days of receipt of invoice for the completion of the project and following a post-demolition job walk.
- 13. COORDINATION Contractor shall accommodate District representative who will be monitoring Contractor's activities.
- 14. WORK HOURS Generally standard work hours shall occur between the hours of 8:00 am to 3:00 pm, Monday through Friday unless otherwise authorized by a District representative.
- 15. HEALTH AND SAFETY All work shall be done in a safe, workmanlike manner. Work performed, methods, and equipment used shall be in conformance with the prevailing State and Federal Occupational Safety and Health Act. Costs from delays and losses due to Contractor operations not in conformance to these acts, or stoppages by OSHA inspectors or the designated representative, as a result of non-conformance, shall be solely borne by the Contractor.
 - All Cal-OSHA and Title 8 requirements shall be followed for access to confined spaces. Confined space entry procedures shall be submitted prior to contract award.
- 16. LICENSES Contractor must possess the following Contractor licenses:
 - a. Contractors State License Board C-21 Building Moving / Demolition or equivalent.
- 17. TRAFFIC CONTROL The Contractor shall be responsible, during all phases of the work to provide for public safety and convenience. Operations shall be conducted in such a manner as to cause as little inconvenience as possible to the abutting property owners.

- 18. STORMWATER POLLUTION CONTROL The Contractor shall exercise every reasonable precaution to prevent the discharge of any material which is not solely stormwater to the storm drain system. Non-allowable discharges include, but are not limited to, eroded soil from stockpiles or disturbed earth on-site, concrete, and concrete washout water, saw cut slurry, fuel, oil, and other vehicle fluids, solid wastes, and construction chemicals.
 - The Contractor will be responsible for the complete cleanup of all material that is discharged from the project(s) in violation of the Discharge Rules. Should the Contractor fail to clean up such discharges promptly and effectively, District may cause the cleanup to be performed by others, the costs to be deducted from any monies due or to become due the Contractor.
- 19. SUBCONTRACTORS The Contractor may utilize the services of specialty Subcontractors on those parts of the work that, under normal contracting practices, are performed by a specialty Subcontractor. It is understood that at least 50% of the work to be performed shall be performed by the Contractor. Any Subcontractor used must adhere to the same terms as the Contractor. The Contractor shall be fully responsible to the District for the performance of their Subcontractor, and of person either directly or indirectly employed by them.
- 20. INSURANCE REQUIREMENTS The Contractor shall procure and maintain for the duration of the contract, insurance against claims for injuries to persons or damages to property, which may arise from or in connection with the performance of the work hereunder by the Contractor, his agents, representatives, employees, or sub-Contractors. All sub-Contractors shall be required to comply with the applicable insurance provisions. The maintenance of proper coverage is a material element of the contract and failure to maintain or renew coverage or to provide evidence of renewal may be treated by the District as a material breach of contract.

The Contractor will be required to provide insurance in accordance with the attached Agreement included in Appendix A.

- 21. MAINTENANCE OF RECORDS AND ACCOUNTING The Contractor shall maintain, during the Project implementation time and for a period of three (3) years after completion of the Project, accurate and organized records of all costs of any type and all services performed for the Project. District will have the right at any time, including during the performance of all Phases of the Project to audit and copy all such records.
- 22. RESPONSE REQUIREMENTS All Contractors are required to follow the format specified below. The content of the proposal must be clear, concise, and complete. Each section of the proposal shall be presented according to the outline shown below to aid in expedient information retrieval.

Four (4) copies of the proposal shall be delivered no later than 2:00 pm on Tuesday, April 27, 2021 to:

Location: Yucaipa Valley Water District

12770 Second Street Yucaipa, California 92399

Please note that faxed copies will not be accepted. Also note that incomplete proposals, incorrect information, or late submittals may be cause for immediate disqualification. The District reserves the right to amend the Project Information prior to the date that proposals are due. Amendments to the Project Information shall be

emailed to all potential Contractors and posted online. The District reserves the right to extend the date by which the proposals are due.

General Response Requirements - Sealed proposals submitted in response to this Project Information shall conform and consist of the information included in Attachment "B".

23. PUBLIC DISCLOSURE - All proposals submitted in response to this Project Information become the property of the District and public records, and as such may be subject to public review. Under the California Public Records Act (California Government Code Section 6250 et seq.) records in the custody of a public entity generally have to be disclosed unless the information being sought falls into one or more of the exemptions to disclosure set out in Government Code Sections 6254 through 6255. The cover letter of the proposal should contain a paragraph that states whether or not Contractor believes that its proposal does or does not contain information that falls into one of the exemptions of Government Code Sections 6254 through 6255 and whether or not Contractor considers such information to be confidential.

In the absence of a declaration, District may be obligated to disclose proposal to any party that requests it. Regardless of assertions of confidentiality, proposal contents may still be disclosed if District, or a court with jurisdiction, determines that such proposal is a public record requiring disclosure.

- 24. PROPOSAL SCHEDULE The solicitation receipt and evaluation of proposals and the selection of the Contractor will conform to the following schedule (Note: Dates are subject to change):
 - Non-Mandatory Pre-Bid Job Walk: Tuesday, April 6, 2021 at 9:00 am
 - Bids Due / Bid Opening: Tuesday, Tuesday, April 27, 2021 at 2:00 pm
 - Anticipated Board Award of Contract: Tuesday, May 4, 2021
 - Anticipated Execution of Agreement: Prior to Friday, May 14, 2021
 - Anticipated written Notice to Proceed: Prior to Monday, May 17, 2021
 - Completion of Project: Prior to June 28, 2021 (40 Calendar Days from the Written Notice to Proceed.)
- 25. PROPOSAL SELECTION PROCESS Award will be based on best value not lowest responsible respondent. Proposals will be considered only in their entirety. The District reserves the right to reject any or all proposals without qualifications, to select a Contractor based on proposals received without interview, and to negotiate specific requirements and costs using the selected proposal as a basis. District reserves the right to discuss and negotiate scope, costs, and schedule as needed. At any time prior to the District executing a Contract with the selected Contractor, if that Contractor cannot meet any of the RFP conditions, the District has the option of selecting another Contractor. The District reserves the right to enter into contracts with multiple Contractors.
- 26. PROPOSAL EVALUATION CRITERIA Selection of the Contractor will be based on best ability to respond quickly with appropriate capabilities. Proposals will be evaluated based on best value as determined multiple factors including but not limited to location, staffing, equipment, past experience, reputation, safety rating, and bond rating.

27. CONTRACT TERMS AND CONDITIONS - Issuance of this Project Information does not commit District to award a contract, or to pay any costs incurred in the preparation of a response to this request. District retains the right to reject any or all submittals. Selection is dependent upon the negotiation of a mutually acceptable contract with the successful Contractor. No modifications to the standard contract language will be granted.

Each submittal shall be valid for not less than one hundred and twenty (120) days from the date of receipt.

All insurance shall be provided at the sole cost and expense of the firm selected unless the requirement is modified or waived by the District. District reserves the right to modify the insurance limits or to substitute project insurance during contract negotiations.

The Yucaipa Valley Water District looks forward to receiving a proposal from your company. If you have any questions regarding this information, please contact:

Matt Porras, Implementation Manager Phone: (909) 790-3300 Email: mporras@yvwd.us

APPENDIX A

Standard Agreement

CONTRACT SERVICES AGREEMENT FOR CONTRACTOR SERVICES RELATED TO THE

DEMOLITION OF STRUCTURES

| THIS CONTRACT SERVICES AGREEMENT ("Agreement") is made this | _day of | , 2021, |
|--------------------------------------------------------------------|----------------|---------|
| by and between the YUCAIPA VALLEY WATER DISTRICT a special distric | ct ("District" |) and |
| ("Contractor"). | ` | , |

NOW THEREFORE, the parties hereto agree as follows:

1.0 SERVICES OF CONTRACTOR

- 1.1 <u>Scope of Services</u>. In compliance with all of the terms and conditions of this Agreement, the Contractor shall perform all the work set forth in the Scope of Services attached hereto as <u>Exhibit "A"</u> and incorporated herein by reference. Contractor warrants that all work and services set forth in the Scope of Services will be performed in a competent, professional, and satisfactory manner.
- 1.2 <u>Compliance with Law</u>. All work and services rendered hereunder shall be provided in accordance with all ordinances, resolutions, statutes, rules, and regulations of the District and any Federal, State, or local governmental agency of competent jurisdiction.
- 1.3 <u>Licenses, Permits, Fees and Assessments</u>. Contractor shall obtain at its sole cost and expense such licenses, permits and approvals as may be required by law for the performance of the services required by this Agreement.

2.0 COMPENSATION

| 2.1 <u>C</u> | <u>contrac</u> | <u>t Sur</u> | <u>n</u> . Upon cor | npletio | on of | all wo | ork | and services | rende | red p | ursuant to | this |
|--------------|----------------|--------------|---------------------|---------|-------------|---------|-----|---------------|--------|-------|------------|------|
| Agree | ment, | the | Contractor | shall | be | paid | in | accordance | with | the | "Schedule | of |
| Comp | ensatio | on" a | ttached here | to as | <u>Exhi</u> | bit "B" | an | d incorporate | d here | in by | reference, | but |
| not to | excee | d the | maximum c | ontrac | t am | ount o | f | • | | | | |
| | _ (\$ | |) ("Cont | ract S | um") |). | | | | | | |

2.2 <u>Method of Payment</u>. Provided that Contractor is not in default under the terms of the Agreement, the Contractor shall submit progress payments by the 5th of each month for approval by the Board of Directors at the regular meeting, generally held on the third Wednesday of every month. A 10% retention will be held from each progress payment. Upon completion of the work [and acceptance of final field measurements] the Yucaipa Valley Water District will file a Board authorized Notice of Completion. The 10% retention will be released (35) days after the filing of the Notice of Completion.

3.0 COORDINATION OF WORK

3.1 <u>Representative of Contractor</u>. [Name and Title] is hereby designated as being the principal representative of the Contractor, authorized to act in its behalf with respect to the work and services specified herein and to make all decisions in connection therewith.

- 3.2 <u>Contract Officer</u>. Matt Porras, Implementation Manager of the Yucaipa Valley Water District is hereby designated as the representative of the District, authorized to act in its behalf with respect to the work and services specified herein and make all decisions in connection therewith ("Contract Officer"). The General Manager of the District shall have the right to designate another Contract Officer by providing notice to the Contractor.
- 3.3 <u>Prohibition Against Subcontracting or Assignment</u>. Contractor shall not contract with any entity to perform in whole or in part the work and services required hereunder without the express written approval of the District. Neither this Agreement nor any interest herein may be assigned or transferred, voluntarily or by operation of law, without the prior written approval of the District. Any such prohibited assignment or transfer shall be void.
- 3.4 <u>Independent Contractor</u>. Contractor shall perform all work and services required herein as an independent contractor of the District and shall remain under only such obligations as are consistent with that role. Contractor shall not at any time or in any manner represent that it or any of its agents or employees are agents or employees of the District.

4.0 INSURANCE AND INDEMNIFICATION

4.1 The Contractor shall procure and maintain for the duration of the work and services, insurance against claims for injuries to persons or damage to property which may arise from or in connection with the performance of the work hereunder by the Contractor, its agents, representatives, or employees. The Contractor shall purchase and maintain insurance, in amounts equal to the requirements in the form and manner provided for in the Contract Documents. Nothing contained in these insurance requirements is to be construed as limiting the liability of the Contractor or the Contractor's sureties.

Certificates of commercial general liability, automobile liability, and workers compensation insurance, also pollution liability coverage, if requested by the District, to the satisfaction of the District is required.

- 4.2 Minimum Limits of Insurance. Contractor shall maintain limits no less than:
 - (a) <u>Commercial General Liability</u>. \$1,000,000 combined single limit per occurrence for bodily injury, personal injury, and property damage.
 - (b) <u>Automobile Liability</u>. \$1,000,000 combined single limit per accident for bodily injury and property damage.
 - (c) <u>Workers' Compensation and Employer's Liability Insurance</u>. Workers' Compensation limits as required by the Labor Code of the State of California and Employer's Liability in the amount of, at least, \$1,000,000 per accident, for bodily injury and disease.
- 4.3 <u>Deductibles and Self-insured Retention</u>. Any deductibles of self-insured retention must be declared to and approved by the District. At the option of the District either, the insurer shall reduce or eliminate such deductibles or self-insured retention as respects the District, its officers, officials, employees, agents, or volunteers; or the Contractor shall procure a bond guaranteeing payment of losses and related investigations, claims administration and defense expense.

4.4 Other Insurance Provisions. All of the above policies of insurance shall be primary insurance and shall name the District, its officers, officials, employees, agents, or volunteers as additional insured. The insurer shall waive all rights of subrogation and contribution it may have against the District, its officers, officials, employees, agents or volunteers and their respective insurers. All or said policies of insurance shall provide that said insurance may not be amended or canceled without prior written notice by registered mail to the District. In the event any of said policies of insurance are canceled, the Contractor shall prior to the cancellation date, submit new evidence of insurance in conformance with Section 4.1 to the Contract Officer. No work or services under this Agreement shall commence until the Contractor has provided the District with Certificates of Insurance or appropriate insurance binders evidencing the above insurance coverages and said Certificates of Insurance or binders are approved by the District.

The Contractor agrees that the provisions of this section shall not be construed as limiting in any way the extent to which the Contractor may be held responsible for the payment of damages to any persons or property resulting from the Contractor's activities or the activities of any person or persons for which the Contractor is otherwise responsible.

The insurance required by Agreement shall be satisfactory only if issued by companies to do business in California, rated "A" or better in the most recent edition of Best Rating Guide, the Key Rating Guide or in the Federal Register, and only if they are of a financial category Class VII or better, unless such requirements are waived by the District due to unique circumstance.

- 4.5 <u>Indemnification</u>. Contractor agrees to indemnify the District, its officers, officials, employees, agents or volunteers against, and will hold and save them and each of them harmless from, any and all actions, suits, claims damages to persons or property, losses, costs, penalties, obligations, errors, omissions or liabilities, (herein "claims or liabilities") that may be asserted or claimed by any person, firm or entity arising out of or in connection with the negligent performance of the work or services of the Contractor, its agents, employees, or invitees, provided for herein, or arising from the negligent acts or omissions of the Contractor hereunder, or arising from Contractor's negligent performance of or failure to perform any term, provision covenant or condition of this Agreement, whether or not there is concurrent passive or active negligence on the part of the District, its officers, officials, employees, agents or volunteers but excluding such claims or liabilities arising from the sole negligence or willful misconduct of the District, its officers, officials, employees, agents or volunteers, who are directly responsible to the District, and its connection therewith:
 - (a) Contractor will defend any action or actions filed in connection with any of said claims or liabilities and will pay all costs and expenses, including legal costs and attorney's fees incurred in connection therewith.
 - (b) Contractor will promptly pay any judgment rendered against the District, its officers, officials, employees, agents, or volunteers for any such claims or liabilities arising out of or in connection with the negligent performance of or failure to perform such work or services of the Contractor hereunder; and Contractor, agrees to save and hold the District, its officers, officials, employees, agents, or volunteers harmless therefrom.

(c) In the event the District, its officers, officials, employees, agents or volunteers is made a party to any action or proceeding filed or prosecuted against the Contractor for such damages or other claims arising out of or in connection with negligent performance of or failure to perform the work or services of the Contractor hereunder, Contractor agrees to pay to the District, its officers, officials, employees, agents or volunteers, any and all costs and expenses incurred by the District, its officers, officials, employees, agents or volunteers in such action or proceeding, including but not limited to legal costs and attorneys' fees.

5.0 TERM OF AGREEMENT

5.1 <u>Term</u>. This Agreement shall be effective from and after the date it is signed on behalf of the District. The Agreement shall continue in full force and effect until completion of the work and services described hereunder. After final inspection, a Notice of Completion will be duly accepted by the Board of Directors and filed by the Yucaipa Valley Water District.

6.0 MISCELLANEOUS

- 6.1 <u>Covenant Against Discrimination</u>. Contractor covenants that, by and for itself, its heirs, executors, assigns and all persons claiming under or through them, that there shall be no discrimination against or segregation of, any person or group of persons on account of race, color, creed, religion, sex, marital status, nation origin, or ancestry in the performance of this Agreement. Contractor shall take affirmative action to ensure that applicants are employed and that employees are treated during employment without regard to their race, color, creed, religion, sex, marital status, nation origin, or ancestry.
- 6.2 <u>Non-liability of District Officers and Employees</u>. No officer or employee of the District shall be personally liable to the Contractor, or any successor in interest, in the event of any default or breach by the District or for any amount which may become due to the Contractor or to its successor, or for breach of any obligation of the terms of this agreement.
- 6.3 <u>Conflict of Interest</u>. No officer or employee of the District shall have any financial interest, direct or indirect, in this Agreement nor shall any such officer or employee participate in any decision relating to the Agreement which effects his financial interest or the financial interest of any corporation, partnership or association in which he is, directly or indirectly, interested, in violation of any State statute or regulation. The Contractor warrants that it has not paid or given and will not pay or give any third party any money or other consideration for obtaining this Agreement.
- 6.4 <u>Notice</u>. Any notice, demand, request, document, consent, approval, or communication either party desires or is required to give to the other party or any other person shall be in writing and either served personally or sent by prepaid, first-class mail, in the case of the District, to the General Manager and to the attention of the Contract Officer, Yucaipa Valley Water District, P.O. Box 730, Yucaipa, CA 92399, and in the case of the Contractor, to the person at the address designated on the execution page of this Agreement.
- 6.5 <u>Interpretation</u>. The terms of this Agreement shall be construed in accordance with the meaning of the language used and shall not be construed for or against either party

by reason of the authorship of this Agreement or any other rule of construction which might otherwise apply.

- 6.6 <u>Integration: Amendment</u>. It is understood that there are no oral agreements between the parties hereto affecting this Agreement and this Agreement supersedes and cancels any and all previous negotiations, arrangements, and understandings, if any, between the parties, and none shall be sued to interpret this Agreement. This Agreement may be amended at any time by the mutual consent of the parties by an instrument in writing.
- 6.7 <u>Severability</u>. In the event that part of this Agreement shall be declared invalid or unenforceable by a valid judgment or decree of a court of competent jurisdiction, such invalidity or unenforceability shall not affect any of the remaining portions of this Agreement which are hereby declared as severable and be interpreted to carry out the intent of the parties hereunder unless the invalid provision is so material that its invalidity deprives either party of the basic benefit or their bargain or renders this Agreement meaningless.
- 6.8 <u>Waiver</u>. No delay or omission in the exercise of any right or remedy by a nondefaulting party on any default shall impair such right or remedy or be construed as a waiver. A party's consent to or approval of any act by the other party requiring the party's consent or approval shall not be deemed to waive or render unnecessary the other party's consent to or approval of any subsequent act. Any waiver by either party of any default must be in writing and shall not be a waiver of any other default concerning the same or any other provision of this Agreement.
- 6.9 <u>Attorney's Fees</u>. If either party to this Agreement is required to initiate or defend or made a party to any action or proceeding in any way connected with this Agreement, the prevailing party in such action or proceeding, in addition to any other relief which may be granted, whether legal or equitable, shall be entitled to reasonable attorney's fees.
- 6.10 <u>Corporate Authority</u>. The persons executing this Agreement on behalf of the parties hereto warrant that (i) such party is duly organized and existing, (ii) they are duly authorized to execute and deliver this Agreement on behalf of said party, (iii) by so executing this Agreement, such party is formally bound to the provisions of this Agreement, and (iv) the entering into this Agreement does not violate any provision of any other Agreement to which said party is bound.

IN WITNESS WHEREOF, the parties have executed and entered into this Agreement as of the date first written above.

| YUCAIPA VALLEY WATER DISTRICT |
|-------------------------------|
| By: |
| |
| CONTRACTOR |
| |
| By: |
| Address: |

SCOPE OF SERVICES

Attach Scope of Services

APPENDIX B

Bid Proposal

The undersigned bidder hereby proposes to furnish all labor, materials, equipment, tools, methods, and services necessary to perform all work proposed herein and the undersigned also acknowledges that all bid prices include sales tax and all other applicable taxes and fees, including any amounts payable by the District for taxes which may result from this proposal.

Said bidder fully understands the scope of the work and has carefully checked all words and figures inserted in the Bid and he/she further understands that the Owner will in no way be responsible for any errors or omissions in the preparation of this Bid.

| The undersigned is lice | ensed in accordance | with the Laws of | the State of California: | |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------------------------------------------------------------|---|
| License: | Number: | | Class: | |
| | act Completion Sche | | under the contract within the timelow, and to accept in full paymen | |
| | Demolition of S | Structures Loc | ated At: | |
| 12 | e Structure on 2 nd S 12806 2 nd Street, Y 816 2 nd Street, Yuc 12834 2 nd Street, Y | ucaipa (APN 03 aipa (APN 0319 | 9-121-39), and | |
| | Propos | sal No. 210331 | | |
| Total Bid in Figures: \$ | | | | |
| Total Bid in Words: | | | | |
| _ | | | | |
| The Contract Work sha to Proceed). | III be complete by Jun | e 21, 2021 (40 Ca | alendar Days from the Written Notic | е |
| Dated: | | | | |
| | | (Bidd | ler - Print Name / Title) | |
| | | | (Signature) | |
| Contractor Name: | | | | |
| Address: | | | | |
| Contact Name: | | | | |
| Contact Phone: | | | | |
| Contact Email: | | | | |

APPENDIX C

Additional Documentation



Project:

Asbestos Survey Report

12806 2nd St. Yucaipa, CA 92399

Project Number: 2300

Local Office:

Magnolia Environmental, LLC 885 Mango St. Brea, CA 92821 Office: 562-922-3144

Client:

Yucaipa Valley Water District

Date Report Issued:

October 13, 2020



Page 2 of 27

Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020 Project Number: 2300

TABLE OF CONTENTS

| Introduction | 3 |
|----------------------------|---|
| Purpose and Scope | 3 |
| Methods | 4 |
| A. Asbestos | 4 |
| Results | 5 |
| A. Asbestos | 5 |
| Conclusion/Recommendations | 7 |
| A.Asbestos | 7 |

Appendices

| Appendix A | Asbestos Laboratory Analytical Results, Chain of Custody |
|------------|----------------------------------------------------------|
| Appendix B | Site Photographs |
| Appendix C | Site Map/Sketch |
| Appendix D | |



Page 3 of 27

Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020 Project Number: 2300

.....

INTRODUCTION

The client referenced above retained Magnolia Environmental to perform an asbestos-containing material (ACM) survey to investigate the subject property prior to demolition. The survey included the sampling of suspect asbestos containing materials, and a visual assessment of the interior spaces at the subject property. Cal- OSHA Certified Asbestos Consultant (CAC) No. 17- 5929, performed the on-site survey on October 8, 2020.

Magnolia Environmental report is for the exclusive use of our client referenced above and applies only to the structures referenced above or portion thereof. No one other than our client or those contracted by our client may utilize, reference, or otherwise rely on this report without prior written consent from Magnolia Environmental.

PURPOSE AND SCOPE

The purpose of this investigation is to perform a hazardous asbestos materials survey in order to aid our client referenced above in investigating the subject property prior to demolition. Magnolia Environmental scope of work included:

- A visual reconnaissance of the impacted area on property to evaluate the possible presence of ACM.
- Collection of bulk samples of suspect ACM and submittal of samples to a NVLAP accredited laboratory for analysis.
- Assessment of the condition of potential ACM.
- Preparation of this report, which presents our data and summarizes the assessed materials.



Page 4 of 27

Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020

Project Number: 2300

METHODS

A. ASBESTOS

Suspect asbestos materials are sampled and later identified using the Polarized Light Microscopy (PLM) method in accordance with the EPA Interim method of the Determination of Asbestos in Bulk Samples (EPA/600/ R-93/116, July 1993). Sampling was performed in accordance with 40 CFR 763.86. Homogeneous areas were based on the total functional space. Number of samples per homogeneous area was taken as recommended under said section "Sampling Procedures".

The PLM Method is the most commonly used method to analyze building materials for the presence of asbestos. This method utilizes the optical properties of minerals to identify the selected constituent. The use of this method enables identification of the type and the percentage of asbestos in each sample. The detection limit of the PLM method for asbestos identification is about one (1) percent asbestos. Because the State of California recognizes asbestos-containing building material (ACBM) as any material, which contains greater than or equal to one tenth of one percent (.1) asbestos, materials containing "trace" amounts of asbestos are reported as ACBM in the State of California.

Documentation of the laboratory results should be retained as a reference for general building safety and maintenance, and for any future renovation/ demolition activities.

INSPECTION PROCEDURE (763.85)

<u>Areas Inspected</u>: The inspector performed a preliminary walk-through to designate the functional spaces. She also noted which areas had homogeneous materials.

The inspector then visually inspected each accessible room being impacted during the demolition. The inspector touched suspect materials to determine if they were friable. For each suspect material, the inspector noted its condition and the potential for disturbance.

Quantities: Suspect asbestos-containing materials identified at the site were quantified. For general functional space measurements were used. Such measurements provide "approximate square or linear footage" (763.93 (d)(2)(ii)). Suspect Asbestos-Containing Materials: were sampled for laboratory analysis or were visually identified as ACM. Magnolia Environmental collected a total of Thirty Three (33) bulk samples of suspect ACM. The samples were transferred following proper chain of custody protocol to Ecologics Laboratories, located at 1012 Segovia Circle Placentia, CA 92870, for analysis. Ecologics Laboratories is an accredited laboratory for bulk asbestos analysis under the National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program (Certification Number 600190-0).



Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020

Project Number: 2300

Page 5 of 27

RESULT

A. ASBESTOS

Thirty Three (33) bulk samples were taken using polarized light microscopy (PLM). The following table summarizes the results of the sample analysis and of the visual assessment. A complete list of sample results can be found in the laboratory sheets at the end of this report.

TABLE I: ACM RESULTS

| MTL# | Material Description | Sample Location | F/NF ¹ | Cond. ² | %ACM ³ | # Samples | Est. Quantity |
|------|-------------------------|------------------------------------------------------------------------------|-------------------|--------------------|-------------------|-----------|---------------|
| 01 | Plaster | Plaster sampled from the living room | NF | G | 0% | 3 | 216 SF |
| 02 | Gypsum Board | Gypsum board sampled from the kitchen, side room, and laundry room | NF | G | 0% | 3 | 175 SF |
| 03 | Joint Compound | In-between gypsum boards sampled from the kitchen, bedroom, and laundry room | NF | G | 0% | 3 | 75 SF |
| 04 | Green 12x12 Floor Tile | Green 12x12 floor tile sampled from the kitchen and laundry room | NF | G | 0% | 3 | 210 SF |
| 05 | Sheet Flooring | Sheet flooring sampled from the kitchen | NF | G | 25% | 3 | 113 SF |
| 06 | Brown 9x9 Floor Tile | Brown 9x9 floor tile sampled from the kitchen and living room | NF | G | 5% | 3 | 340 SF |
| 07 | Beige Sheet Flooring | Beige sheet flooring sampled from the bathroom | NF | G | 0% | 3 | 20 SF |
| 08 | Roof Shingles | Roof shingles sampled from the roof of the property | NF | G | 0% | 3 | 657 SF |
| 09 | Rolled Roofing | Rolled roofing sampled from the attached shed at the property | NF | G | 0% | 3 | 25 SF |



Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020

Project Number: 2300

Page 6 of 27

| MTL# | Material Description | Sample Location | F/NF ¹ | Cond. ² | %ACM ³ | # Samples | Est. Quantity |
|------|----------------------------|-------------------------------------------------------------------|-------------------|--------------------|-------------------|-----------|---------------|
| 10 | Roofing Penetration Mastic | Roofing penetration mastic sampled from the roof around the ducts | NF | G | 5% | 3 | 5 SF |
| 11 | Window Putty | Window putty sampled from the exterior windows | NF | G | 0% | 3 | 5 SF |

¹-F=Friable; NF= Non-Friable



 $^{^2}$ -Cond = condition of Materials. Either good (G), damaged (D), or significantly damaged (SD)

³- <1% = Calif. Code of Regulation, Title 8, Section 1529. "asbestos-containing construction" material means any manufactured construction material which contains more than one-tenth of 1 percent asbestos by weight. This material will be abated as asbestos containing material; however, it may be disposed of as construction debris.

^{*}See the laboratory report and chain custodies for the complete list materials tested and the sampling locations.

^{**}Should the demolition/renovation process reveal any additional suspect asbestos-containing materials; work must stop until the suspect materials are tested for asbestos content.

Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020

Project Number: 2300

Page 7 of 27

CONCLUSION / RECOMMENDATIONS

A. ASBESTOS

According to bulk sampling and visual inspection of impacted areas, <u>asbestos-containing</u> materials were present in the following materials sampled:

- Sheet flooring
- Brown 9x9 floor tile
- Roofing penetration mastic

Abatement by a licensed abatement contractor is recommended prior to disturbance of asbestos-containing materials.

It is always necessary to comply with the pertinent provisions of EPA, OSHA and AQMD regulations during any removal or repair activities that may disturb the asbestos- containing materials that may have been inaccessible and or untested during the survey. Not all areas of the home were tested, only impacted areas. Caution should be taken when inaccessible and untested areas are disturbed.

The Environmental protection Agency (EPA) and California OSHA (Cal/OSHA) define materials which contain more than one percent asbestos to be asbestos containing materials (ACM). In addition, Cal/OSHA defines any manufactured construction material more than 0.1% asbestos as asbestos- containing construction materials (ACCMs). Cal/OSHA also requires notification and registration of the contractor when disturbing materials with more than one-tenth of one percent asbestos and regulates worker protection whenever materials containing any detectable levels of asbestos are disturbed.



Page 8 of 27

Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020

Project Number: 2300

LIMITATIONS

Magnolia Environmental prepared this asbestos survey for the client referenced above. No warranties expressed or implied, are made by Magnolia Environmental or its employees as to the use of any information, apparatus, product or process disclosed in this report. Though reasonable efforts have been made to assure correctness, if a Contractor is employed, he should bring any discrepancies to the immediate attention of Magnolia Environmental.

We have employed state-of-the-art practices to perform this analysis of risk and identification, but this evaluation is severely limited in scope to areas accessible to a visual inspection or through reasonable means of the areas evaluated. No demolition or product review was performed in attempts to reveal material compositions. Our services consist of professional opinions and recommendations made in accordance with generally accepted engineering principles and practices and are designed to provide an analytical tool to assist the client. Magnolia Environmental or those representing Magnolia Environmental bear no responsibility for the actual condition of the structure or safety of a site pertaining to asbestos and/or asbestos contamination regardless of the actions taken by the client.

Magnolia Environmental appreciated having the opportunity to inspect your property. If you have any questions regarding this survey or other environmental hazards, please don't hesitate to contact us at (562) 922-3144 or at Office@Magnoliaenvironmental.com.

Andrea Pulsipher Project Consultant CAC No. 17-5929 Property Address: 12806 2nd St. Yucaipa, CA 92399 Date of Survey: October 8, 2020 Project Number: 2300

Page 9 of 27

APPENDIX A

ASBESTOS LABORATORY ANALYTICAL RESULTS AND CHAIN OF CUSTODY



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Project #: 2300

Project #: 2300

Date Collected: 10/08/2020

Date Received: 10/08/2020

Project Name: N/A

Date Analysis: 10/12/2020

No of Samples: 33

Project Location: 12806 2nd St Yucaipa, CA 92399 Date Reported: 10/12/2020 Collected By: A. Pulsipher

| Client ID | Layer# | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------------------|--------------------------------------------------------------------|-------------------|---------------------|----------------------------|
| P-1 | 20100816.01.A | 20100816.01 | | |
| Location Analyst Description / Color | : Living Room : Plaster w/ Skim Coat,Granular,Cementitious,Non- | -Homogenous/White | No | None Detected |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 5% Cellulose,95%Non-Fibrous Material | | | |
| P-2 | 20100816.02.A | 20100816.02 | | |
| Location Analyst Description / Color | : Living Room : Plaster w/ Skim Coat,Granular,Cementitious,Non- | -Homogenous/White | No | None Detected |
| Asbestos % Type Other Material Type | : NON : 5% Cellulose,95%Non-Fibrous Material | | | |
| P-3 | 20100816.03.A | 20100816.03 | | |
| Location Analyst Description / Color | : Living Room : Plaster w/ Skim Coat,Granular,Cementitious,Non- | No | None Detected | |
| Asbestos % Type Other Material Type | : NON : 5% Cellulose,95%Non-Fibrous Material | | | |
| GB-1 | 20100816.04.Λ | 20100816.04 | | |
| Location Analyst Description / Color | : Kitchen : Drywall,Firm,Non-Homogenous/White | | No | None Detected |
| Asbestos % Type Other Material Type | : NON : ,100%Non-Fibrous Material | | | |
| GB-2 | 20100816.05.A | 20100816.05 | | |
| Location Analyst Description / Color | : Side Room : Drywall,Firm,Non-Homogenous/White | | No | None Detected |
| Asbestos % Type Other Material Type | : NON : ,100%Non-Fibrous Material | | | |

Paniel Morel

od – Analyst Paola Duc

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA — 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Abbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Abbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory.



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Date Received: 10/08/2020

Project Mame: N/A

Project #: 2300

Project Location: 12806 2nd St Yucaipa, CA 92399

Date Reported: 10/12/2020

Date Reported: 10/12/2020

Collected By: A. Pulsipher

| Client ID | Layer# | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|-----------------------------------------------|-------------|---------------------|----------------------------|
| GB-3 | 20100816.06.A | 20100816.06 | | |
| Location | : Laundry | | No | None Detected |
| Analyst Description / Color | : Drywall,Firm,Non-Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,100%Non-Fibrous Material | | | |
| JC-1 | 20100816.07.A | 20100816.07 | | |
| Location | : Kitchen | | No | None Detected |
| Analyst Description / Color | : Joint Compound, Firm, Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,50%Non-Fibrous Material,35%Ca | Со | | |
| JC-2 | 20100816.08.A | 20100816.08 | | |
| Location | : Bedroom | | No | None Detected |
| Analyst Description / Color | : Joint Compound,Firm,Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,50%Non-Fibrous Material,35%Ca | Со | | |
| JC-3 | 20100816.09.А | 20100816.09 | | |
| Location | : Laundry | | No | None Detected |
| Analyst Description / Color | : Joint Compound, Firm, Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,50%Non-Fibrous Material,35%Ca | Со | | |
| F-1 | 20100816.10.A | 20100816.10 | | |
| Location | : Kitchen | | No | None Detected |
| Analyst Description / Color | : Linoleum,Firm,Homogenous/Gray,Green | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,65%Non-Fibrous Material,35%Binders / CaCO | | | |

Pmillerd

Paola Ducoing – Approved By

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/INVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory.



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Date Received: 10/08/2020

Project #: 2300

Project Location: 12806 2nd St Yucaipa, CA 92399

Date Reported: 10/12/2020

Date Reported: 10/12/2020

Collected By: A. Pulsipher

| Client ID | Layer # | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|----------------------------------------------|-------------|---------------------|----------------------------|
| F-1 | 20100816.10.B | 20100816.10 | | |
| Location | : Kitchen | | No | None Detected |
| Analyst Description / Color | : Adhesive,Firm,Homogenous/Tan | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,55%Non-Fibrous Material,45%Adhesive | | | |
| F-2 | 20100816.11.A | 20100816.11 | | |
| Location | : Kitchen | | No | None Detected |
| Analyst Description / Color | : Linoleum,Firm,Homogenous/Gray,Green | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,55%Non-Fibrous Material,45%Binders / CaCO | | | |
| F-2 | 20100816.11.B | 20100816.11 | | |
| Location | : Kitchen | | No | None Detected |
| Analyst Description / Color | : Adhesive,Firm,Homogenous/Tan | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,55%Non-Fibrous Material,45%Adhesive | | | |
| F-3 | 20100816.12.A | 20100816.12 | | |
| Location | : Laundry | | No | None Detected |
| Analyst Description / Color | : Linoleum,Firm,Homogenous/Gray,Green | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,55%Non-Fibrous Material,45%Binders / CaCO | | | |
| F-3 | 20100816.12.B | 20100816.12 | | |
| Location | : Laundry | | No | None Detected |
| Analyst Description / Color | : Adhesive,Firm,Homogenous/Tan | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,55%Non-Fibrous Material,45%Adhesive | | | |

Paola Ducoing – Approved By

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this nalytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory.



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Date Received: 10/08/2020

Project #: 2300

Project Location: 12806 2nd St Yucaipa, CA 92399

Date Reported: 10/12/2020

Date Reported: 10/12/2020

Collected By: A. Pulsipher

| Client ID | Layer# | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------------------|-----------------------------------------------------------------------|-------------|---------------------|----------------------------|
| F2-1 | 20100816.13.A | 20100816.13 | | |
| Location Analyst Description / Color | : Kitchen : Vinyl & Fibrous Material, Fibrous, Firm, Homogene | ous/Beige | Yes | 25% Chrysotile |
| Asbestos % Type Other Material Type | : Chrysotile : 15% Cellulose,60%Non-Fibrous Material | | | |
| F2-2 | 20100816.14.A | 20100816.14 | | |
| Location Analyst Description / Color | Kitchen Vinyl & Fibrous Material,Fibrous,Firm,Homogenous/Beige | | Yes | 25% Chrysotile |
| Asbestos % Type Other Material Type | : Chrysotile : 15% Cellulose,60%Non-Fibrous Material | | | |
| F2-2 | 20100816.14.B | 20100816.14 | | |
| Location Analyst Description / Color | : Kitchen : Adhesive,Firm,Homogenous/Tan | | No | None Detected |
| Asbestos % Type Other Material Type | : NON : ,100%Non-Fibrous Material | | | |
| F2-3 | 20100816.15.A | 20100816.15 | | |
| Location Analyst Description / Color | : Kitchen : Vinyl & Fibrous Material,Fibrous,Firm,Homogenous/Beige | | Yes | 25% Chrysotile |
| Asbestos % Type Other Material Type | : Chrysotile : 15% Cellulose,60%Non-Fibrous Material | | | |
| F3-1 | 20100816.16.A | 20100816.16 | | |
| Location Analyst Description / Color | : Kitchen : Linoleum,Firm,Homogenous/Brown | | Yes | 5% Chrysotile |
| Asbestos % Type Other Material Type | : Chrysotile : ,95%Non-Fibrous Material | | | |

Daniel Wood – Analyst

Puniel Mord

Paola Ducoing – Approved By

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this nalytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory.



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Date Received: 10/08/2020

Project #: 2300

Project Location: 12806 2nd St Yucaipa, CA 92399

Date Reported: 10/12/2020

Date Reported: 10/12/2020

Collected By: A. Pulsipher

Client ID Layer# Lab ID Asbestos Total Est.% of Present Asbestos 20100816.16.B 20100816.16 F3-1 Location : Kitchen Nο None Detected Analyst Description / Color : Mastic,Firm,Homogenous/Brown Asbestos % Type Other Material Type : ,85%Non-Fibrous Material,15%Asphaltic Matrix F3-2 20100816.17.A 20100816.17 : Living Room Yes 5% Chrysotile Location : Linoleum, Firm, Homogenous/Brown Analyst Description / Color Asbestos % Type : ,95%Non-Fibrous Material Other Material Type F3-3 20100816.18.A 20100816.18 : Living Room Yes 5% Chrysotile Location Analyst Description / Color : Linoleum, Firm, Homogenous/Brown Asbestos % Type : ,95%Non-Fibrous Material Other Material Type F4-1 20100816.19.A 20100816.19 Location : Bathroom None Detected No Analyst Description / Color : Vinyl,Firm,Homogenous/Tan Asbestos % Type Other Material Type : ,100%Non-Fibrous Material F4-1 20100816.19.B 20100816.19 Location : Bathroom No None Detected Analyst Description / Color : Mastic,Firm,Homogenous/Black Asbestos % Type : NON Other Material Type : ,75%Non-Fibrous Material,25%Asphaltic Matrix

Paola Ducoing – Approved By

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA — 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory.



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Date Received: 10/08/2020

Project #: 2300

Project Location: 12806 2nd St Yucaipa, CA 92399

Date Reported: 10/12/2020

Date Reported: 10/12/2020

Collected By: A. Pulsipher

Client ID Layer# Lab ID Asbestos Total Est.% of Present Asbestos 20100816.20 F4-2 20100816.20.A Location : Bathroom Nο None Detected Analyst Description / Color : Vinyl,Firm,Homogenous/Tan Asbestos % Type Other Material Type : ,100%Non-Fibrous Material F4-2 20100816.20.B 20100816.20 Location : Bathroom No None Detected Analyst Description / Color : Mastic,Firm,Homogenous/Brown Asbestos % Type Other Material Type : ,100%Non-Fibrous Material F4-3 20100816.21.A 20100816.21 Location : Bathroom No None Detected Analyst Description / Color : Vinyl,Firm,Homogenous/Tan Asbestos % Type Other Material Type : ,100%Non-Fibrous Material F4-3 20100816.21.B 20100816.21 Location None Detected : Bathroom No Analyst Description / Color : Mastic, Firm, Homogenous/Brown Asbestos % Type Other Material Type : ,100%Non-Fibrous Material R-1 20100816.22.A 20100816.22 Location : Roof No None Detected Analyst Description / Color : Shingle ,Fibrous,Firm,Homogenous/Black : NON Asbestos % Type Other Material Type : 35% Fiberglass, 35% Cellulose, 30% Non-Fibrous Material

I mie nova

Paola Ducoing - Approved By

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA — 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory.



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental Date Collected: 10/08/2020 LAB Job #: 20100816 Address: 885 Mango St. Brea, CA 92821 Date Received: 10/08/2020 Project Name: N/A Project #: 2300 No of Samples: 33 Date Analysis: 10/12/2020 Project Location: 12806 2nd St Yucaipa, CA 92399 Date Reported: 10/12/2020 Collected By: A. Pulsipher

Client ID Layer# Lab ID Asbestos Total Est.% of Present Asbestos 20100816.23 R-2 20100816.23.A Location : Roof Nο None Detected Analyst Description / Color : Shingle ,Fibrous,Firm,Homogenous/Black Asbestos % Type Other Material Type : 35% Fiberglass,35% Cellulose,30%Non-Fibrous Material 20100816.24.A R-3 20100816.24 Location : Roof No None Detected Analyst Description / Color : Shingle ,Fibrous,Firm,Homogenous/Black Asbestos % Type Other Material Type : 35% Fiberglass, 35% Cellulose, 30% Non-Fibrous Material R2-1 20100816.25.A 20100816.25 Location : Attached Shed No None Detected Analyst Description / Color : Shingle ,Fibrous,Firm,Homogenous/Black,White Asbestos % Type Other Material Type : 45% Fiberglass,55%Non-Fibrous Material R2-2 20100816.26.A 20100816.26 Location : Attached Shed None Detected No Analyst Description / Color : Shingle ,Fibrous,Firm,Homogenous/Black,White Asbestos % Type Other Material Type : 45% Fiberglass,55%Non-Fibrous Material R2-3 20100816.27.A 20100816.27 Location : Attached Shed No None Detected Analyst Description / Color : Shingle ,Fibrous,Firm,Homogenous/Black,White Asbestos % Type Other Material Type : 45% Fiberglass,55%Non-Fibrous Material

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA -- 40 CFR Appendix E to Subpart E of Part 763. Interim Method of the Determination of Asbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government, Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Date Received: 10/08/2020

Project #: 2300

Project Location: 12806 2nd St Yucaipa, CA 92399

Date Reported: 10/12/2020

Date Reported: 10/12/2020

Collected By: A. Pulsipher

| Client ID | Layer# | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|------------------------------------------------|-------------|---------------------|----------------------------|
| RPM-1 | 20100816.28.A | 20100816.28 | | |
| Location | : Roof Around Ducts | | Yes | 5% Chrysotile |
| Analyst Description / Color | : Mastic,Soft,Homogenous/Black | | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : ,50%Non-Fibrous Material,45%Asphaltic Matrix | | | |
| RPM-2 | 20100816.29.A | 20100816.29 | | |
| Location | : Roof Around Ducts | | Yes | 5% Chrysotile |
| Analyst Description / Color | : Mastic,Soft,Homogenous/Black | | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : ,50%Non-Fibrous Material,45%Asphaltic Matrix | | | |
| RPM-3 | 20100816.30.A | 20100816.30 | | |
| Location | : Roof Around Ducts | | Yes | 5% Chrysotile |
| Analyst Description / Color | : Mastic,Soft,Homogenous/Black | | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : ,50%Non-Fibrous Material,45%Asphaltic Matrix | | | |
| WP-1 | 20100816.31.А | 20100816.31 | | |
| Location | : Exterior Windows | | No | None Detected |
| Analyst Description / Color | : Window Putty, Soft, Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,100%Non-Fibrous Material | | | |
| WP-2 | 20100816.32.A | 20100816.32 | | |
| Location | : Exterior Windows | | No | None Detected |
| Analyst Description / Color | : Window Putty,Soft,Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,100%Non-Fibrous Material | | | |

I Mace Mora

Paola Ducoing – Approved By

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/INVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory.



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental Date Collected: 10/08/2020 LAB Job #: 20100816 Address: 885 Mango St. Brea, CA 92821 Date Received: 10/08/2020 Project Name: N/A Project #: 2300 Date Analysis: 10/12/2020 No of Samples: 33 Project Location: 12806 2nd St Yucaipa, CA 92399 Date Reported: 10/12/2020 Collected By: A. Pulsipher

| Client ID | Layer # | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------------------|------------------------------------------------------------------|-------------|---------------------|----------------------------|
| WP-3 | 20100816.33.A | 20100816.33 | | |
| Location Analyst Description / Color | : Exterior Windows Color : Window Putty, Soft, Homogenous/White | | | None Detected |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,100%Non-Fibrous Material | | | |

Pmiel Mord

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples & EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials. Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory

20100816



CHAIN OF CUSTODY



1012 Segovia Circle, Placentia, CA 92870 Ph. (714) 632 8100 Fx. (714) 632 8111

| | CONTACT INFORMAT | | | | PE | OJECT | INFOR | MATI | N * | | |
|---------|------------------------------------------------------------|-----------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------|----------------------------|-----------------------------------------|---------------------------|----------------------|--------|
| - | Magnolia Environmental,L | LC | Project | | | | | *************************************** | | LOCAL PROPERTY AND A | |
| | Address: 885 Mango St. Brea,CA | | | Project location: 12806 2nd 51. | | | | | | | |
| | Andrea Pulsipher | | Project | locatio | | | | | | | |
| | ults to: Maglábresults@gma | il.com | Date sa | mplad | | aipa, | CA a | 2399 | | | |
| 4 | \$ / | | Sample | | 10 | Pulsiph- | , | | | | |
| | ASBESTOS | | | and the same | | MIC | | LOCK. | 1. | | |
| PLM. | Bulk Analysis (EPA 600/R-93) | /116) | Fun | gi: Nor | | Mold (| | | | | Alma S |
| | 1,000 Point Count (<0.1%) | | ☐ Fun | | | | | Sw) | | | |
| | 100 Point Count (<0.25%) | | ☐ Fun | gi: Cua | ntitati | ve Spore | e Count | Direct | Exam (| TL, B, S | N) |
| | metric Point Pount (<0.1%) | . = | | | | oliform, | | | | | |
| | Airborne Fiber Count (NIOSI Airborne Fiber Count with T | | Bact | eria: 1 | Total Co | oliform, | E. coli, | Entero | coccus | (P/A) | |
| | : COUNT WITH | WA | L Carr | on Bla | ack & N | /laterial | Science | e Analy | sis | | |
| | nd time (TAT) *: 3-4 Hrs | □6-8 Hrs □241 | Hrs 🗍 | 48 Hrs | (<u>M</u>) | 2 Hrs | Othe | r. | | | |
| | l information/ Special instru | | | 10.1113 | | LINS | | | | | |
| ☑ Stop | at 1st positive on samples gr | eat 1%, EXCEPT for: | | | | | | | | | |
| | osite 1 wall system sample | f found to be great t | han or e | qual 1 | %. | | | | | | |
| U Other | | | | Name of Street, Street | | | | | | | |
| SAMPLE | EOCATION * | DESCRIPTION | * | А | SBEST | OS FRIABLE | | MICRO ME | 81010 | | 4 |
| | | | | COND | SF/UF | Y/N | CONTRACTOR OF THE PARTY OF | The second second second | the state of the state of | STOP | TOTAL |
| P-1 | Living noom | Plaster | | 6 | 216 | Λ. | | 1 | | | |
| P-2 | - | 1 | | 1 | 1 | 1 | | | - | | |
| 0-3 | | | • | 1 | | 1 | | | | | |
| GB-1 | Kitalin | Cypson Boa | rd | G | 175 | N | | | | | |
| 68-2 | Side Room | 1 | | | 1 . | 100 | | | | | |
| 68-3 | Laundry | | | 1 | 1 | | 784,40 | . 7 | r ma | | |
| Jc-1 | k.tchen | Joint compo | inne | 6 | 75 | ~ | | | | | |
| 51-2 | Bedroom | | | - | 1 | 1 | | | | | |
| 76.3 | Laurdri | | | 1 | | 1 | | | | | |
| | Fog Rain Snow Wind | Clear TIME.* D | ATE* | RE | TINQU | ISHED E | Y * | | RECE | VED BY | |
| Weathe | | X 4202 30 | 18/20 | A | · Polo | sipher | | 4 | D | 2 | |

Page 1 of ____

^{*} Necessary information for processing.

ST: Spore Trap, TL: Tape Lift, B: Bulk, Sw: Swab, P/A: Presence/ Absence, QTY: Quantity, SF: Square Foot, LF: Length Foot, COND: Conditions: G = Good; D = Damage; SD = Significantly Damage.

20100816

Company: ___



CHAIN OF CUSTODY

Magnolia Environmental Project #: 2300

1012 Segovia Circle, Placentia, CA 92870 Ph. (714) 632 8100 Fx. (714) 632 8111



| | | | - 1 | SBEST | os | MICROBIOLOGY/PCM | | | | |
|----------------|---------------|--------------------|------|-------|---------|------------------|------|------|------|------|
| SAMPLE ID | LOCATION * | DESCRIPTION * | COND | | FRIABLE | | ME | | wc | TOTA |
| Basic Services | | | | SF/LF | Y/N | STAR | STOP | STAR | STOP | IOIA |
| F-1 | Kitchen | Green 12612 TITE | 6 | 210 | N | | | | | |
| F-2 | 1 | | | | 1 | | | | | |
| F-3 | Laundry | | 1 | 1 | | | | | | |
| F2-1 | Kitchen | Sheet Flooring | 6 | 113 | N | | | | | |
| F2-2 | | 1 | 1 | 1 | i | | | | | |
| F2-3 | J | | 1 | | 1 | | | | | |
| F3-1 | Kitchen | Brown and till | 6 | 340 | ~ | | | | | |
| F3-2 | Living Nov- | 1 | 1 | 1 | 1 | | | | * | |
| F3-3 | 1 | | 1 | 1 | | | | | | |
| Fu-1 | Bathroom | Best Sher Plooning | G | 20 | ·N | | | | | |
| F4-2 | 1 | | 1 | 1 | | | | | | |
| Fu-3 | L | | | J | | | | | | |
| R-1 | R006 | Nove Shingles | 6 | 657 | N | | | | | |
| 2-2 | 1 | 1 | 1 | | 1 | | * | | | |
| 12-3 | | | 1 | | 1 | | | | | |
| R2-1 | Artached Shed | Rolled Roofin | G | 25 | N | | | | | |
| R2-2 | 1 | | | | 1 | | | | | |
| 122-3 | | 1 | V | 1 | | | | | | |

^{*} Necessary information for processing.

ST: Spore Trap, TL: Tape Lift, B: Bulk, Sw: Swab, P/A: Presence/ Absence, QTY: Quantity, SF: Square Foot, LF: Length Foot, COND: Conditions: G = Good; D = Damage; SD = Significantly Damage.

20100816



Company:

CHAIN OF CUSTODY

1012 Segovia Circle, Placentia, CA 92870 Ph. (714) 632 8100 Fx. (714) 632 8111



MAGNOVA ENVIYORMENTAI Project #: 2300 **ASBESTOS** MICROBIOLOGY/PCM SAMPLE ID **LOCATION* DESCRIPTION** * QTY FRIABLE TIME FLOW COND TOTAL SF/LF Y/N STAR STOP STAR STOP Rpm-1 Roos around duces ROOF Penetration Musta P-PM-2 Rpm-3 WP-1 EMERKOT Windows Wendow Putty WP-Z W1-3

ST: Spore Trap, TL: Tape Lift, B: Bulk, Sw: Swab, P/A: Presence/ Absence, QTY: Quantity, SF: Square Foot, LF: Length Foot, **COND**: Conditions: **G** = Good; **D** = Damage; **SD** = Significantly Damage.

Page 3 of 3

^{*} Necessary information for processing.

Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020 Project Number: 2300

Page 22 of 27

APPENDIX B

SITE PHOTOGRAPHS

Page 23 of 27

Property Address: 12806 2nd St. Yucaipa, CA 92399 Date of Survey: October 8, 2020 Project Number: 2300



Picture 1: Scope of kitchen flooring



Picture 3: Asbestos-containing brown 9x9 floor tile



Picture 2: Asbestos-containing sheet flooring



Picture 3: Asbestos-containing roofing penetration mastic around the ducts



Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020 Project Number: 2300

Page 24 of 27

APPENDIX C

SITE MAPS/SKETCH

Page 25 of 27

Property Address: 12806 2nd St. Yucaipa, CA 92399 Date of Survey: October 8, 2020

Project Number: 2300

Sketch not to scale.

Sample ID indicates location of sampling.

| | Break Room | | R2-2 R2-3 | R2 Sho | | | |
|------|----------------------------------------|------|----------------|------------|------------------|------|-----|
| | GB-3 JC-3 Laundry Room F-3 | | RPM-3 | F 4 | F4-1 Bathroom | F4-3 | |
| | F-1 F2-2 F3-1 | | R2-3 | | RPM-2 | | |
| | F-2 F2-1 Kitchen GB-1 F2-3 | JC-2 | Bedroom R-2 | | Side Ro RPM-1 | GB-2 | WP- |
| WP-1 | JC-1 | \R-1 | F3-2 | P | -1 F3-3 | P-1 | |
| | P-2 | LIV | ing Kooni | | | r-1 | |

WP-2

Property Address: 12806 2nd St. Yucaipa, CA 92399

Date of Survey: October 8, 2020 Project Number: 2300

Page 26 of 27

APPENDIX D

ACCREDITATION AND CERTIFICATION



Project:

Limited Asbestos Survey Report

12816 2nd St. Yucaipa, CA 92399

Project Number: 1481

Local Office:

Magnolia Environmental, LLC 885 Mango St. Brea, CA 92821 Office: 562-922-3144

Client:

Yucaipa Valley Water District

Date Report Issued:

December 26, 2019

Page 2 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399 Date of Survey: December 18, 2019 Project Number: 1481

TABLE OF CONTENTS

| Introduction | 3 |
|-------------------|---|
| Purpose and Scope | |
| Methods | |
| A. Asbestos | |
| Results | |
| | |
| A. Asbestos | |
| Recommendations | |
| A. Asbestos | € |

Appendices

| Appendix A | Asbestos Laboratory Analytical Results, Chain of Custody |
|------------|----------------------------------------------------------|
| Appendix B | Site Photographs |
| Appendix C | Site Map/Sketch |
| Appendix D | Accreditations and Certification |



Page 3 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019

Project Number: 1481

INTRODUCTION

The client referenced above retained Magnolia Environmental to perform an asbestos-containing material (ACM) to investigate the property referenced above prior a demolition of the subject property. The survey included the sampling of suspect asbestos containing materials, and a visual assessment of the interior spaces at the subject property. Cal- OSHA Certified Asbestos Consultant (CAC) No. 17-5929, performed the on-site survey on December 18, 2019

Magnolia Environmental report is for the exclusive use of our client referenced above and applies only to the structures referenced above or portion thereof. No one other than our client or those contracted by our client may utilize, reference, or otherwise rely on this report without prior written consent from Magnolia Environmental.

PURPOSE AND SCOPE

The purpose of this investigation is to perform a hazardous asbestos materials survey in order to aid our client referenced above in investigating the subject property prior to demolition. Magnolia Environmental scope of work included:

- A visual reconnaissance of the impacted area on property to evaluate the possible presence of ACM.
- Collection of bulk samples of suspect ACM and submittal of samples to a NVLAP accredited laboratory for analysis.
- Assessment of the condition of potential ACM.
- Preparation of this report, which presents our data and summarizes the assessed materials.



Page 4 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019

Project Number: 1481

METHODS

ASBESTOS A.

Suspect asbestos materials are sampled and later identified using the Polarized Light Microscopy (PLM) method in accordance with the EPA Interim method of the Determination of Asbestos in Bulk Samples (EPA/600/ R-93/116, July 1993). Sampling was performed in accordance with 40 CFR 763.86. Homogeneous areas were based on the total functional space. Number of samples per homogeneous area was taken as recommended under said section "Sampling Procedures".

The PLM Method is the most commonly used method to analyze building materials for the presence of asbestos. This method utilizes the optical properties of minerals to identify the selected constituent. The use of this method enables identification of the type and the percentage of asbestos in each sample. The detection limit of the PLM method for asbestos identification is about one (1) percent asbestos. Because the State of California recognizes asbestos-containing building material (ACBM) as any material, which contains greater than or equal to one tenth of one percent (.1) asbestos, materials containing "trace" amounts of asbestos are reported as ACBM in the State of California.

Documentation of the laboratory results should be retained as a reference for general building safety and maintenance, and for any future renovation/demolition activities.

INSPECTION PROCEDURE (763.85)

Areas Inspected: The inspector performed a preliminary walk-through to designate the functional spaces. She also noted which areas had homogeneous materials.

The inspector then visually inspected each accessible room being impacted prior to demolition. The inspector touched suspect materials to determine if they were friable. For each suspect material, the inspector noted its condition and the potential for disturbance.

Quantities: Suspect asbestos-containing materials identified at the site were quantified. For general functional space measurements were used. Such measurements provide "approximate square or linear footage" (763.93 (d)(2)(ii)). Suspect Asbestos-Containing Materials: were sampled for laboratory analysis or were visually identified as ACM. Magnolia Environmental collected a total of Fifteen (15) bulk samples of suspect ACM. The samples were transferred following proper chain of custody protocol to Ecologics Laboratories, located at 1012 Segovia Circle Placentia, CA 92870, for analysis. Ecologics Laboratories is an accredited laboratory for bulk asbestos analysis under the National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program (Certification Number 600190-0).



Page 5 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019

Project Number: 1481

RESULT

A. ASBESTOS

Fifteen (15) bulk samples were taken using polarized light microscopy (PLM). The following table summarizes the results of the sample analysis and of the visual assessment. A complete list of sample results can be found in the laboratory sheets at the end of this report.

TABLE I: ACM RESULTS

| MTL# | Material Description | Sample Location | F/NF ¹ | Cond. ² | %ACM ³ | # Samples | Est. Quantity |
|------|-------------------------|----------------------------------------------------------------------|-------------------|--------------------|-------------------|-----------|---------------|
| 01 | Wall System | Wall system throughout the living room, kitchen and bedroom 3 | NF | G | 0% | 3 | 1,200 SF |
| 02 | Joint Compound | In-between wall systems throughout the kitchen, bath 2 and bedroom 3 | NF | G | 0% | 3 | 30 SF |
| 03 | Black Flooring | Flooring throughout closet | NF | G | 0% | 3 | 14 SF |
| 04 | Roofing | Roof of property | NF | G | 0% | 3 | 2,000 SF |
| 05 | HVAC Duct Wrap | Around HVAC ducts in attic | NF | G | 15% | 3 | 145 SF |
| 06 | 6" Transite Pipe | Pipe running through home | NF | G | Assumed | 0 | 25 SF |

¹⁻F=Friable; NF= Non-Friable



²-Cond = condition of Materials. Either good (G), damaged (D), or significantly damaged (SD)

³ - <1% = Calif. Code of Regulation, Title 8, Section 1529. "asbestos-containing construction" material means any manufactured construction material which contains more than one-tenth of 1 percent asbestos by weight. This material will be abated as asbestos containing material; however, it may be disposed of as construction debris.

^{*}See the laboratory report and chain custodies for the complete list materials tested and the sampling locations.

^{**}Should the demolition/renovation process reveal any additional suspect asbestos-containing materials; work must stop until the suspect materials are tested for asbestos content.

Page 6 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399 Date of Survey: December 18, 2019

Project Number: 1481

RECOMMENDATIONS

A. ASBESTOS

The Environmental protection Agency (EPA) and California OSHA (Cal/OSHA) define materials which contain more than one percent asbestos to be asbestos containing materials (ACM). In addition, Cal/OSHA defines any manufactured construction material more than 0.1% asbestos as asbestos- containing construction materials (ACCMs). Cal/OSHA also requires notification and registration of the contractor when disturbing materials with more than one-tenth of one percent asbestos and regulates worker protection whenever materials containing any detectable levels of asbestos are disturbed. According to bulk sampling and visual inspection of impacted areas, asbestos-containing materials were present in the following materials sampled:

- HVAC duct wrapping in the attic
- Assumed ACM 6" Transite Pipe running through home

Abatement by a licensed abatement contractor is required prior to disturbance of asbestos-containing materials. It is always necessary to comply with the pertinent provisions of EPA, OSHA and AQMD regulations during any removal or repair activities that may disturb the asbestos-containing materials that may have been inaccessible and or untested during the survey. Not all areas of the home were tested, only impacted areas. Caution should be taken when inaccessible and untested areas are disturbed.



Page 7 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019

Project Number: 1481

LIMITATIONS

Magnolia Environmental prepared this asbestos survey for the client referenced above. No warranties expressed or implied, are made by Magnolia Environmental or its employees as to the use of any information, apparatus, product or process disclosed in this report. Though reasonable efforts have been made to assure correctness, if a Contractor is employed, he should bring any discrepancies to the immediate attention of Magnolia Environmental.

We have employed state-of-the-art practices to perform this analysis of risk and identification, but this evaluation is severely limited in scope to areas accessible to a visual inspection or through reasonable means of the areas evaluated. No demolition or product review was performed in attempts to reveal material compositions. Our services consist of professional opinions and recommendations made in accordance with generally accepted engineering principles and practices and are designed to provide an analytical tool to assist the client. Magnolia Environmental or those representing Magnolia Environmental bear no responsibility for the actual condition of the structure or safety of a site pertaining to asbestos and/or asbestos contamination regardless of the actions taken by the client.

Magnolia Environmental appreciated having the opportunity to inspect your property. If you have any questions regarding this survey or other environmental hazards, please don't hesitate to contact us at (562) 922-3144 or at Office@Magnoliaenvironmental.com.

Andrea Pulsipher Project Consultant CAC No. 17-5929

Page 8 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019 Project Number: 1481

APPENDIX A

ASBESTOS LABORATORY ANALYTICAL RESULTS AND CHAIN OF CUSTODY



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client : Magnolia Environmental Date Collected: 12/18/2019 LAB Job # :19121904 Address:885 Mango St. Brea, CA 92821 Date Received: 12/19/2019 Project Name: N/A Project #:1481 Date Analysis: 12/21/2019 No of Samples: 15

Project Location: 12816 2nd St Yucaipa Date Reported: 12/21/2019 Collected By: A. Pulsipher

| Client ID | Layer # | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|------------------------------------------|-------------|---------------------|----------------------------|
| | | | | |
| WS-1 | 19121904.01.A | 19121904.01 | | |
| Location | : Living Room | | No | None Detected |
| Analyst Description / Color | : Drywall,Firm,Non-Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,85%Non-Fibrous Material | | | |
| WS-2 | 19121904.02.A | 19121904.02 | | |
| Location | : Kitchen | | No | None Detected |
| Analyst Description / Color | : Drywall,Firm,Non-Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 10% Cellulose,90%Non-Fibrous Material | | | |
| WS-3 | 19121904.03.A | 19121904.03 | | |
| Location | : Bedroom 3 | | No | None Detected |
| Analyst Description / Color | : Drywall,Firm,Non-Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 10% Cellulose,90%Non-Fibrous Material | | | |
| JC-1 | 19121904.04.A | 19121904.04 | | |
| Location | : Kitchen | | No | None Detected |
| Analyst Description / Color | : Joint Compound, Firm, Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,90%Non-Fibrous Material,10%CaCo | | | |

The analyses of the samples in this report were performed and analyzed in accordance with the procedure outlined in the US Federal Register 40 CFR 763, Subpart F, Appendix A EPA-600/R-93/116 (Method for Determination of Asbestos in Building Materials), and EPA-600/M4-82-020 (US EPA Interim Method for the Determination of Asbestos in Build Insulation Samples). Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analyses only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of threemonths unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory. Analyst of Optical Microscopy Samples analyzed by Ecologics Lab, CA, NVLAP Lab Code 600190-0.



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client : Magnolia Environmental Date Collected: 12/18/2019 LAB Job # : 19121904 Address: 885 Mango St. Brea, CA 92821 Date Received: 12/19/2019 Project Name: N/A Project #:1481 Date Analysis: 12/21/2019 No of Samples: 15

Project Location: 12816 2nd St Yucaipa Date Reported: 12/21/2019 Collected By: A. Pulsipher

| Client ID | Layer # | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|------------------------------------------------|-------------|---------------------|----------------------------|
| | | | | |
| JC-2 | 19121904.05.A | 19121904.05 | | |
| Location | : Bath 2 | | No | None Detected |
| Analyst Description / Color | : Joint Compound, Firm, Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,85%Non-Fibrous Material,15%CaCo | | | |
| JC-3 | 19121904.06.A | 19121904.06 | | |
| Location | : Bedroom 3 | | No | None Detected |
| Analyst Description / Color | : Joint Compound, Firm, Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,85%Non-Fibrous Material,15%CaCo | | | |
| F-1 | 19121904.07.A | 19121904.07 | | |
| Location | : Closet. | | No | None Detected |
| Analyst Description / Color | : Flooring,Firm,IIomogenous/Black | | | |
| Asbestos % Type | ; NON | | | |
| Other Material Type | : 5% Cellulose,70%Non-Fibrous Material,25%Bind | lers | | |
| F-1 | 19121904.07.B | 19121904.07 | | |
| Location | : Closet. | | No | None Detected |
| Analyst Description / Color | : Mastic,Firm,Homogenous/Brown | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,55%Non-Fibrous Material,45%Adhesive | | | |

The analyses of the samples in this report were performed and analyzed in accordance with the procedure outlined in the US Federal Register 40 CFR 763, Subpart F, Appendix A; EPA-600/R-93/116 (Method for Determination of Asbestos in Building Materials), and EPA-600/M4-82-020 (US EPA Interim Method for the Determination of Asbestos in Builk Insulation Samples). Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analyses only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of threemonths unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory. Analyst of Optical Microscopy Samples analyzed by Ecologies Lab, CA, NVLAP Lab Code 600190-0. Page 2 of 5



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client : Magnolia Environmental Date Collected: 12/18/2019 LAB Job # : 19121904 Address: 885 Mango St. Brea, CA 92821 Date Received: 12/19/2019 Project Name: N/A Project #:1481 Date Analysis: 12/21/2019 No of Samples: 15

Project Location: 12816 2nd St Yucaipa Date Reported: 12/21/2019 Collected By: A. Pulsipher

| Client ID | Layer # | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|------------------------------------------------|-------------|---------------------|----------------------------|
| | | | | |
| F-2 | 19121904.08.A | 19121904.08 | | |
| Location | : Closet. | | No | None Detected |
| Analyst Description / Color | : Flooring,Firm,Homogenous/Black | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 5% Cellulose,60%Non-Fibrous Material,35%Bind | ders | | |
| F-2 | 19121904.08.B | 19121904.08 | | |
| Location | : Closet. | | No | None Detected |
| Analyst Description / Color | : Mastic,Firm,Homogenous/Brown | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,60%Non-Fibrous Material,40%Adhesive | | | |
| F-3 | 19121904.09.A | 19121904.09 | | |
| Location | : Closet. | | No | None Detected |
| Analyst Description / Color | : Flooring,Firm,Homogenous/Black | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 5% Cellulose,60%Non-Fibrous Material,35%Bind | ders | | |
| F-3 | 19121904.09.B | 19121904.09 | | |
| Location | : Closet. | | No | None Detected |
| Analyst Description / Color | : Mastic,Firm,Homogenous/Brown | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : ,60%Non-Fibrous Material,40%Adhesive | | | |

The analyses of the samples in this report were performed and analyzed in accordance with the procedure outlined in the US Federal Register 40 CFR 763, Subpart F, Appendix A; EPA-600/R-93/116 (Method for Determination of Asbestos in Building Materials), and EPA-600/M4-82-020 (US EPA Interim Method for the Determination of Asbestos in Builk Insulation Samples). Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analyses only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of threemonths unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory. Analyst of Optical Microscopy Samples analyzed by Ecologies Lab, CA, NVLAP Lab Code 600190-0. Page 3 of 5



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental Date Collected: 12/18/2019 LAB Job # : 19121904
Address: 885 Mango St. Brea, CA 92821 Date Received: 12/19/2019 Project Name: N/A
Project #:1481 Date Analysis: 12/21/2019 No of Samples: 15

D : . T . .: 12016 2 16:37 :

Project Location: 12816 2nd St Yucaipa Date Reported: 12/21/2019 Collected By: A. Pulsipher

| Client ID | Layer# | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|---------------------------------------------------|-----------------|---------------------|----------------------------|
| | | | | |
| R-1 | 19121904.10.A | 19121904.10 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roof Material, Fibrous, Granular, Non-Homogenou | s/Black | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 30% Fiberglass,60%Non-Fibrous Material,10%As | sphaltic Matrix | | |
| R-2 | 19121904.11.A | 19121904.11 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roof Material, Fibrous, Granular, Non-Homogenou | s/Black | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 35% Fiberglass,55%Non-Fibrous Material,10%As | sphaltic Matrix | | |
| R-3 | 19121904.12.A | 19121904.12 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roof Material, Fibrous, Granular, Non-Homogenou | s/Black | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 35% Fiberglass,55%Non-Fibrous Material,10%As | sphaltic Matrix | | |
| D1-1 | 19121904.13.A | 19121904.13 | | |
| Location | : Attic | | Yes | 15% Chrysotile |
| Analyst Description / Color | : HVAC Duct,Fibrous,Non-Homogenous/Gray,Silv | er | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : 20% Cellulose,65%Non-Fibrous Material | | | |

Ihair Gonzalez – Analyst

Armando Ducoing - Approved By

The analyses of the samples in this report were performed and analyzed in accordance with the procedure outlined in the US Federal Register 40 CFR 763, Subpart F, Appendix A; EPA-600/R-93/126 (Method for Determination of Asbestos in Building Materials), and EPA-600/M-82-020 (US EPA Interim Method for the Determination of Asbestos in Build Insulation Samples). Total percentage of sample constituents may total greater than 100 due to trace mounts. The limit of detection for this analytical method is less than one percent), Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of variability calculated for standard reference samples routinely analyzed for a sabestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analyses only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of threemonths unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory. Analyst of Optical Microscopy



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client : Magnolia Environmental Date Collected: 12/18/2019 LAB Job # : 19121904 Address: 885 Mango St. Brea, CA 92821 Date Received: 12/19/2019 Project Name: N/A Project #:1481 Date Analysis: 12/21/2019 No of Samples: 15

Project Location: 12816 2nd St Yucaipa Date Reported: 12/21/2019 Collected By: A. Pulsipher

| Client ID | Layer # | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------------------|------------------------------------------------------------|-------------|---------------------|----------------------------|
| DI-2 | 19121904.14.A | 19121904.14 | | |
| Location Analyst Description / Color | : Attic : HVAC Duct,Fibrous,Non-Homogenous/Gray,Silv | ver | Yes | 15% Chrysotile |
| Asbestos % Type Other Material Type | : Chrysotile : 25% Cellulose.60%Non-Fibrous Material | | | |
| D1-3 | 19121904.15.A | 19121904.15 | | |
| Location Analyst Description / Color | : Attic : IIVAC Duct,Fibrous,Non-Homogenous/Gray,Silver | | Yes | 15% Chrysotile |
| Asbestos % Type Other Material Type | : Chrysotile : 20% Cellulose,65%Non-Fibrous Material | | | |

The analyses of the samples in this report were performed and analyzed in accordance with the procedure outlined in the US Federal Register 40 CFR 763, Subpart F, Appendix A; EPA-600/R-93/116 (Method for Determination of Asbestos in Building Materials), and EPA-600/M4-82-020 (US EPA Interim Method for the Determination of Asbestos in Builk Insulation Samples). Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analyses only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of threemonths unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not be reproduced except for in full, without the written approval of this laboratory. Analyst of Optical Microscopy Samples analyzed by Ecologies Lab, CA, NVLAP Lab Code 600190-0. Page 5 of 5



CHAIN OF CUSTODY

1012 Segovia Circle, Placentia, CA 92870

| | - N | | | 1904 | |
|-----|-----|-----|-----|----------|----|
| N/E | | ONE | Y-W | | X. |

| RATORIES | Ph. (714) 632 810 | 0 Fx. (714) 6 | 32 8111 | | Magnolia Environmental | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|--------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|--|--|
| CONTACT INFORMA | | | Tallo comments and a second | ECT INFORMAT | | | |
| Company: Magnolia Environmental, l | | Project #: | | ESTANGENIA | | | |
| Address: 885 Mango St. Brea,CA | | Project name: | | | | | |
| Phone: 562-922-3144 | | Project local | | 6 7 nd 6+ | V | | |
| Contact: Andrea Pulsipher | | | 120 | cha ST | , Yucaipa | | |
| Email results to: Maglabresults@gma | ail.com | Date sample | d: A Paisi | oner 12/1 | 8119 | | |
| | | Sampled by: | | Dures 12/1 | 0/17 | | |
| ASBESTOS | | | | VICROBIOLOGY | | | |
| PLM Bulk Analysis (EPA 600/R-93 | /116) | ☐ Fungi: No | on Viable M | | | | |
| PLM 1,000 Point Count (<0.1%) | | ☐ Fungi: No | on Viable M | old (TL, B, Sw) | | | |
| PLM 400 Point Count (<0.25%) | 1 | Fungi: Cu | antitative S | pore Count Direc | ct Exam (TL, B, Sw) | | |
| Gravimetric Point Pount (<0.1%) | | ☐ Bacteria: | Total Colifo | rm, E. coli (P/A) | (12, 2, 311) | | |
| PCM Airborne Fiber Count (NIOSI | 1 7400) | ☐ Bacteria: | Total Colifo | rm, E. coli, Enter | ococcus (P/A) | | |
| PCM Airborne Fiber Count with T | WA 1 | ☐ Carbon B | lack & Mate | erial Science Anal | ysis | | |
| Other: | | | | | | | |
| Turnaround time (TAT) *: 3-4 Hrs | 6-8 Hrs 24 H | Hrs 💢 48 Hi | rs 72 Hr | s Other: | | | |
| Additional information/ Special instru | ictions: | • | | | | | |
| Stop at 1st positive on samples gr | reat 1%, EXCEPT for: | | | | | | |
| ☐ Composite 1 wall system sample ☐ Other: | if found to be great t | han or equal | 1%. | | | | |
| Charles and the second | To the state of | | | The state of the s | | | |
| SAMPLE ID LOCATION * | DESCRIPTION | | ASBEST OS | | OBIOLOGY/PCM | | |
| | | CON | SF/EF Y | | | | |
| WG-1 Living Room | Wall Syst | em 6 | 1,200 | | 1,200 | | |
| 1-2 Kitchen | 1 | 1 | 1 | | 1 | | |
| V-3 Bedsoom 3 | V | | V | | | | |
| JC-1 Kitchen | Joint Comp | os and | 30 | | 121 | | |
| 1-2 Bath 2 | 1 | 00.0 | | | 30 | | |
| V-3 Bedroom 3 | V : | | 1 | | | | |
| F-1 (155et | Black Floor | | 14 | | | | |
| 1-2 | DMOR Plast | 19 | 19 | ++- | 14 | | |
| V-3 | 1/2 | | | | | | |
| V-) V | V | V | \/ | | | | |
| | Clear TIME * DA | Proposition of the proposition of the last | EUNQUISHE | D BY * - | RECEIVED BY | | |
| Weather | 7:50AH 12-19 | | ulsipher | | 20 | | |
| * Necessary information for processing. | | 19-19 | | | | | |
| T: Spore Trap, TL: Tape Lift, B: Bulk, Sw: Swab, P/A: | AM Presence/ Absence, QTY: Ou | antity. SF: Square | Foot IE: Lor -th | Fant /// | | | |
| OND: Conditions: G = Good; D = Damage; SD = Signi | ficantly Damage. | , or . square | Length | root, | ? | | |

| | Fog | Rain | Snow | Wind | Clear | TIME * | DATE * | RELINQUISHED BY * | RECEIVED DV |
|------------|------------|-------------|-----------|------|-------|--------|----------|-------------------|-------------|
| Weather | | | | | | 9:50AH | 12-19-19 | A. Pulsipher | |
| | | | | | | 10:00 | 12-19-19 | | 4 |
| * Necessar | y informat | tion for pr | ocessing. | | | AM | | | 111 |

Page 1 of __



CHAIN OF CUSTODY

1012 Segovia Circle, Placentia, CA 92870 Ph. (714) 632 8100 Fx. (714) 632 8111

| For Laboratory use | only |
|--------------------|------|
| Lab ID: | |

ST: Spore Trap, TL: Tape Lift, B: Bulk, Sw: Swab, P/A: Presence/ Absence, QTY: Quantity, SF: Square Foot, LF: Length Foot, COND: Conditions: G = Good; D = Damage; SD = Significantly Damage.

^{*} Necessary information for processing.

Page 16 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019 Project Number: 1481

APPENDIX B

SITE PHOTOGRAPHS



Page 17 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019 Project Number: 1481



Picture 1: HVAC Duct wrapping in the attic was found to be ACM



Picture 3: Wall system sampled was found to not contain asbestos



Picture 2: Assumed ACM 6" Transite Pipe running through home



Picture 4: Black flooring sampled in closet was found to not contain abestos



Page 18 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019 Project Number: 1481

APPENDIX C

SITE MAPS/SKETCH



Page 19 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399


Date of Survey: December 18, 2019 Project Number: 1481

Sketch not to scale.

Sample ID indicates location of sampling.

Garage 2nd Floor R-3 Bedroom 4 DI-1 DI-2 **HVAC** Closet DI-3 WS-3 Bedroom 3 JC-3

1st Floor

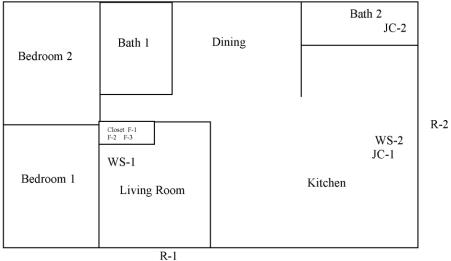

Page 20 of 21

Property Address: 12816 2nd St. Yucaipa, CA 92399

Date of Survey: December 18, 2019 Project Number: 1481

APPENDIX D

ACCREDITATION AND CERTIFICATION





Project:

Asbestos Survey Report

12834 2nd St. Yucaipa, CA 92399

Project Number: 1975

Local Office:

Magnolia Environmental, LLC 885 Mango St. Brea, CA 92821 Office: 562-922-3144

Client:

Yucaipa Valley Water District

Date Report Issued:

June 22, 2020



Page 2 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399 Date of Survey: June 17, 2020 Project Number: 1975

TABLE OF CONTENTS

| Introduction | 3 |
|----------------------------|---|
| Purpose and Scope | 3 |
| Methods | 4 |
| A. Asbestos | 4 |
| Results | 5 |
| A. Asbestos | 5 |
| Conclusion/Recommendations | 7 |
| A.Asbestos | 7 |
| | |
| | |

Appendices

| Appendix A | . Asbestos Laboratory Analytical Results, Chain of Custody |
|------------|------------------------------------------------------------|
| Appendix B | |
| Appendix C | |
| Appendix D | |



Page 3 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975

INTRODUCTION

The client referenced above retained Magnolia Environmental to perform an asbestos-containing material (ACM) survey to investigate the subject property prior to demolition. The survey included the sampling of suspect asbestos containing materials, and a visual assessment of the interior spaces at the subject property. Cal- OSHA Certified Asbestos Consultant (CAC) No. 17- 5929, performed the on-site survey on June 17, 2020.

Magnolia Environmental report is for the exclusive use of our client referenced above and applies only to the structures referenced above or portion thereof. No one other than our client or those contracted by our client may utilize, reference, or otherwise rely on this report without prior written consent from Magnolia Environmental.

PURPOSE AND SCOPE

The purpose of this investigation is to perform a hazardous asbestos materials survey in order to aid our client referenced above in investigating the subject property prior to demolition. Magnolia Environmental scope of work included:

- A visual reconnaissance of the impacted area on property to evaluate the possible presence of ACM.
- Collection of bulk samples of suspect ACM and submittal of samples to a NVLAP accredited laboratory for analysis.
- Assessment of the condition of potential ACM.
- Preparation of this report, which presents our data and summarizes the assessed materials.



Page 4 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975

METHODS

A. ASBESTOS

Suspect asbestos materials are sampled and later identified using the Polarized Light Microscopy (PLM) method in accordance with the EPA Interim method of the Determination of Asbestos in Bulk Samples (EPA/600/ R-93/116, July 1993). Sampling was performed in accordance with 40 CFR 763.86. Homogeneous areas were based on the total functional space. Number of samples per homogeneous area was taken as recommended under said section "Sampling Procedures".

The PLM Method is the most commonly used method to analyze building materials for the presence of asbestos. This method utilizes the optical properties of minerals to identify the selected constituent. The use of this method enables identification of the type and the percentage of asbestos in each sample. The detection limit of the PLM method for asbestos identification is about one (1) percent asbestos. Because the State of California recognizes asbestos-containing building material (ACBM) as any material, which contains greater than or equal to one tenth of one percent (.1) asbestos, materials containing "trace" amounts of asbestos are reported as ACBM in the State of California.

Documentation of the laboratory results should be retained as a reference for general building safety and maintenance, and for any future renovation/ demolition activities.

INSPECTION PROCEDURE (763.85)

<u>Areas Inspected</u>: The inspector performed a preliminary walk-through to designate the functional spaces. She also noted which areas had homogeneous materials.

The inspector then visually inspected each accessible room being impacted in the demolition. The inspector touched suspect materials to determine if they were friable. For each suspect material, the inspector noted its condition and the potential for disturbance.

Quantities: Suspect asbestos-containing materials identified at the site were quantified. For general functional space measurements were used. Such measurements provide "approximate square or linear footage" (763.93 (d)(2)(ii)). Suspect Asbestos-Containing Materials: were sampled for laboratory analysis or were visually identified as ACM. Magnolia Environmental collected a total of Forty Five (45) bulk samples of suspect ACM. The samples were transferred following proper chain of custody protocol to Ecologics Laboratories, located at 1012 Segovia Circle Placentia, CA 92870, for analysis. Ecologics Laboratories is an accredited laboratory for bulk asbestos analysis under the National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program (Certification Number 600190-0).



Page 5 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975

RESULT

A. ASBESTOS

Forty Five (45) bulk samples were taken using polarized light microscopy (PLM). The following table summarizes the results of the sample analysis and of the visual assessment. A complete list of sample results can be found in the laboratory sheets at the end of this report.

TABLE I: ACM RESULTS

| MTL# | Material Description | Sample Location | F/NF ¹ | Cond. ² | %ACM ³ | # Samples | Est. Quantity |
|------|------------------------------|---------------------------------------------------------------------------------|-------------------|--------------------|-------------------|-----------|---------------|
| 01 | Wall System | Wall system sampled in the basement | NF | G | 0% | 3 | 320 SF |
| 02 | Joint Compound | In-between wall systems sampled in the basement | NF | G | 0% | 3 | 100 SF |
| 03 | Plaster | Plaster sampled in the hallway, bedroom 1, and living room | NF | G | 0% | 3 | 720 SF |
| 04 | Layered Sheet Flooring | Layered sheet flooring sampled in the kitchen and side room | NF | G | 30% | 3 | 378 SF |
| 05 | Stucco | Exterior stucco sampled from outside of the basement bathroom | NF | D | 0% | 3 | 20 SF |
| 06 | Window Putty | Window putty sampled from the exterior windows | F | D | 0% | 3 | 25 SF |
| 07 | Thermal System Insulation | Thermal system insulation sampled around the boiler duct | NF | G | 30% | 3 | 5 SF |
| 08 | 12x12 Ceiling Tile | 12x12 Ceiling tile sampled in the side room and the small room near the kitchen | F | D | 0% | 3 | 200 SF |
| 09 | 12x24 Green Ceiling Tile | 12x24 green ceiling tile sampled in the living room | NF | G | 0% | 3 | 247 SF |
| 10 | Shingled Roofing | Shingled roofing sampled from the roof of the subject property | NF | G | 0% | 3 | 1,000 SF |
| 11 | Insulation | Insulation sampled from the side room and the small room near the kitchen | NF | G | 0% | 3 | 400 SF |
| 12 | 9x9 Floor Tile and mastic | 9x9 Floor tile and mastic sampled in the small room near the kitchen | NF | G | 7% | 3 | 50 SF |



Page 6 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975

ACM RESULTS CONTINUED

| MTL# | Material Description | Sample Location | F/NF ¹ | Cond. ² | %ACM ³ | # Samples | Est. Quantity |
|------|-------------------------|------------------------------------------------------------------|-------------------|--------------------|-------------------|-----------|---------------|
| 13 | Penetration Mastic | Penetration mastic sampled from the roof of the subject property | NF | G | 0% | 3 | 15 SF |
| 14 | Rolled Roofing | Rolled roofing sampled from the roof of the subject property | NF | G | 0% | 3 | 300 SF |
| 15 | Particle Board | Particle board sampled from the basement | NF | G | 40% | 3 | 25 SF |
| 16 | 6 inch Transite Pipe | 6 inch transite pipe | NF | G | Assumed | 0 | 25 SF |

¹⁻F=Friable; NF= Non-Friable



²-Cond = condition of Materials. Either good (G), damaged (D), or significantly damaged (SD)

³ - <1% = Calif. Code of Regulation, Title 8, Section 1529. "asbestos-containing construction" material means any manufactured construction material which contains more than one-tenth of 1 percent asbestos by weight. This material will be abated as asbestos containing material; however, it may be disposed of as construction debris.

^{*}See the laboratory report and chain custodies for the complete list materials tested and the sampling locations.

^{**}Should the demolition/renovation process reveal any additional suspect asbestos-containing materials; work must stop until the suspect materials are tested for asbestos content.

Page 7 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975

CONCLUSION / RECOMMENDATIONS

A. ASBESTOS

According to bulk sampling and visual inspection of impacted areas, <u>asbestos-containing</u> <u>materials were present in the following materials sampled:</u>

- · Layered sheet flooring
- Thermal system insulation
- 9x9 Floor tile and mastic
- Particle board

A 6-inch Transite Pipe was observed at the subject property. Although no samples of the transite pipe were collected, the transite pipe is assumed to be asbestos-containing by Andrea Pulsipher, Cal- OSHA Certified Asbestos Consultant (CAC) No. 17-5929

Abatement by a licensed abatement contractor is required prior to disturbance of asbestos-containing materials.

It is always necessary to comply with the pertinent provisions of EPA, OSHA and AQMD regulations during any removal or repair activities that may disturb the asbestos- containing materials that may have been inaccessible and or untested during the survey. Not all areas of the home were tested, only impacted areas. Caution should be taken when inaccessible and untested areas are disturbed.

The Environmental protection Agency (EPA) and California OSHA (Cal/OSHA) define materials which contain more than one percent asbestos to be asbestos containing materials (ACM). In addition, Cal/OSHA defines any manufactured construction material more than 0.1% asbestos as asbestos- containing construction materials (ACCMs). Cal/OSHA also requires notification and registration of the contractor when disturbing materials with more than one-tenth of one percent asbestos and regulates worker protection whenever materials containing any detectable levels of asbestos are disturbed.



Page 8 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975

LIMITATIONS

Magnolia Environmental prepared this asbestos survey for the client referenced above. No warranties expressed or implied, are made by Magnolia Environmental or its employees as to the use of any information, apparatus, product or process disclosed in this report. Though reasonable efforts have been made to assure correctness, if a Contractor is employed, he should bring any discrepancies to the immediate attention of Magnolia Environmental.

We have employed state-of-the-art practices to perform this analysis of risk and identification, but this evaluation is severely limited in scope to areas accessible to a visual inspection or through reasonable means of the areas evaluated. No demolition or product review was performed in attempts to reveal material compositions. Our services consist of professional opinions and recommendations made in accordance with generally accepted engineering principles and practices and are designed to provide an analytical tool to assist the client. Magnolia Environmental or those representing Magnolia Environmental bear no responsibility for the actual condition of the structure or safety of a site pertaining to asbestos and/or asbestos contamination regardless of the actions taken by the client.

Magnolia Environmental appreciated having the opportunity to inspect your property. If you have any questions regarding this survey or other environmental hazards, please don't hesitate to contact us at (562) 922-3144 or at Office@Magnoliaenvironmental.com.

Andrea Pulsipher Project Consultant CAC No. 17-5929

Page 9 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399 Date of Survey: June 17, 2020 Project Number: 1975

APPENDIX A

ASBESTOS LABORATORY ANALYTICAL RESULTS AND CHAIN OF CUSTODY



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Date Received: 06/17/2020

Date Received: 06/17/2020

Project Name: N/A

Project #: 1975

Project Location: 12834 2nd St, Yucaipa, CA 92399

Date Reported: 06/20/2020

Date Reported: 06/20/2020

Collected By: A. Pulsipher

Client ID Layer# Lab ID Total Est.% of Asbestos Present Asbestos WS-1 20061713.01.A 20061713.01 Location None Detected : Basement No Analyst Description / Color : Wall Material, Firm, Homogenous/White Asbestos % Type Other Material Type : 12% Cellulose,88%Non-Fibrous Material WS-2 20061713.02.A 20061713.02 Location : Basement No None Detected Analyst Description / Color : Wall Material, Firm, Homogenous/White Asbestos % Type Other Material Type : 12% Cellulose,88%Non-Fibrous Material WS-3 20061713.03.A 20061713.03 Location : Basement No None Detected Analyst Description / Color : Wall Material, Firm, Homogenous/White Asbestos % Type Other Material Type : 12% Cellulose,88%Non-Fibrous Material JC-1 20061713.04.A 20061713.04 Location : Basement None Detected No Analyst Description / Color : Joint Compound, Firm, Homogenous/White Asbestos % Type Other Material Type : 12% Cellulose,73%Non-Fibrous Material,15%CaCo JC-2 20061713.05.A 20061713.05 Location None Detected : Basement Analyst Description / Color : Joint Compound, Firm, Homogenous/White, Beige Asbestos % Type Other Material Type : 12% Cellulose,73%Non-Fibrous Material,15%CaCo

Lorena Padilla – Analyst

Armando Ducoing – Approved By



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

 Client : Magnolia Environmental
 Date Collected: 06/17/2020
 LAB Job #: 20061713

 Address : 885 Mango St. Brea, CA 92821
 Date Received: 06/17/2020
 Project Name: N/A

 Project #: 1975
 Date Analysis : 06/20/2020
 No of Samples: 45

 Project Location : 12834 2nd St, Yucaipa, CA 92399
 Date Reported: 06/20/2020
 Collected By: A. Pulsipher

Client ID Layer# Lab ID Asbestos Total Est.% of Present Asbestos JC-3 20061713.06.A 20061713.06 None Detected Location : Basement Nο : Joint Compound, Firm, Homogenous/White, Beige Analyst Description / Color Asbestos % Type Other Material Type : 12% Cellulose,73%Non-Fibrous Material,15%CaCo P-1 20061713.07.A 20061713.07 Location : Hall No None Detected Analyst Description / Color : Plaster, Granular, Homogenous/Beige Asbestos % Type Other Material Type : 15% Cellulose,72%Non-Fibrous Material,13%Quartz P-2 20061713.08.A 20061713.08 Location : Bed 1 No None Detected Analyst Description / Color : Plaster, Granular, Homogenous/Beige Asbestos % Type Other Material Type : 15% Cellulose,72%Non-Fibrous Material,13%Quartz P-3 20061713.09.Л 20061713.09 None Detected Location : Living Room Nο Analyst Description / Color : Plaster, Granular, Homogenous/Beige Asbestos % Type Other Material Type : 15% Cellulose,72%Non-Fibrous Material,13%Quartz 20061713.10.A F-1 20061713.10 Location : Kitchen 30% Chrysotile Yes Analyst Description / Color : Floor Tile, Homogenous, Flexible/Tan Asbestos % Type : Chrysotile Other Material Type : 15% Cellulose,43%Non-Fibrous Material,12%Binders

Lorena Padilla – Analyst

Armando Ducoing – Approved By



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

 Client : Magnolia Environmental
 Date Collected: 06/17/2020
 LAB Job #: 20061713

 Address : 885 Mango St. Brea, CA 92821
 Date Received: 06/17/2020
 Project Name: N/A

 Project #: 1975
 Date Analysis : 06/20/2020
 No of Samples: 45

 Project Location : 12834 2nd St, Yucaipa, CA 92399
 Date Reported: 06/20/2020
 Collected By: A. Pulsipher

Client ID Layer# Lab ID Asbestos Total Est.% of Present Asbestos F-1 20061713.10.B 20061713.10 None Detected : Kitchen Location Nο Analyst Description / Color : Felt Flooring, Fibrous, Homogenous/Black, Green Asbestos % Type Other Material Type : 13% Cellulose,15% Fiberglass,72%Non-Fibrous Material 20061713.11.A F-2 20061713.11 : Kitchen 30% Chrysotile Yes Location $: Floor\ Tile, Homogenous, Flexible/Tan$ Analyst Description / Color Asbestos % Type : 15% Cellulose,43%Non-Fibrous Material,12%Binders Other Material Type F-3 20061713.12.A 20061713.12 : Side Room Yes 30% Chrysotile Location Analyst Description / Color : Floor Tile, Homogenous, Flexible/Tan Asbestos % Type : 15% Cellulose,43%Non-Fibrous Material,12%Binders Other Material Type 20061713.13.А 20061713.13 S-1 Location None Detected : Basement Bath Nο Analyst Description / Color : Stucco, Granular, Homogenous/Gray Asbestos % Type Other Material Type : 15% Cellulose,72%Non-Fibrous Material,13%Quartz S-2 20061713.14.A 20061713.14 Location : Basement Bath None Detected No Analyst Description / Color : Stucco, Granular, Homogenous/Gray Asbestos % Type : NON

Lorena Padilla – Analyst

Other Material Type

Armando Ducoing – Approved By

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in the US Federal Register 40 CFR 763, Subpart F, Appendix A; EPA-600/R-93/116 (Method for Determination of Asbestos in Building Materials) and EPA - 40 CFR Appendix E to Subpart E of Part 763, (Interim Method of the Determination of Asbestos in Building Materials) and EPA - 40 CFR Appendix E to Subpart E of Part 763, (Interim Method of the Determination of Asbestos in Building Materials) and EPA - 40 CFR Appendix E to Subpart E of Part 763, (Interim Method of the Determination of Asbestos in Build Insulation Samples). Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not b

: 15% Cellulose,72%Non-Fibrous Material,13%Quartz



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

 Client : Magnolia Environmental
 Date Collected: 06/17/2020
 LAB Job #: 20061713

 Address : 885 Mango St. Brea, CA 92821
 Date Received: 06/17/2020
 Project Name: N/A

 Project #: 1975
 Date Analysis : 06/20/2020
 No of Samples: 45

 Project Location : 12834 2nd St, Yucaipa, CA 92399
 Date Reported: 06/20/2020
 Collected By: A. Pulsipher

| Client ID | Layer # Lab ID | | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|---------------------------------------------------|-------------|---------------------|----------------------------|
| S-3 | 20061713.15.A | 20061713.15 | | |
| Location | : Basement Bath | | | None Detected |
| Analyst Description / Color | : Stucco, Granular, Homogenous/Gray | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,72%Non-Fibrous Material,13%Qu | artz | | |
| WP-1 | 20061713.16.A | 20061713.16 | | |
| Location | : Exterior Windows | | No | None Detected |
| Analyst Description / Color | : Wall Putty,Firm,Homogenous/Gray,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,65%Non-Fibrous Material,20%Ad | hesive | | |
| WP-2 | 20061713.17.A | 20061713.17 | | |
| Location | : Exterior Windows | | No | None Detected |
| Analyst Description / Color | : Wall Putty,Firm,Homogenous/Gray,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,65%Non-Fibrous Material,20%Ad | hesive | | |
| WP-3 | 20061713.18.Λ | 20061713.18 | | |
| Location | : Exterior Windows | | No | None Detected |
| Analyst Description / Color | : Wall Putty,Firm,Homogenous/Gray,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,65%Non-Fibrous Material,20%Ad | hesive | | |
| TSI-1 | 20061713.19.A | 20061713.19 | | |
| Location | : Around Boiler Duct | | Yes | 30% Chrysotile |
| Analyst Description / Color | : Thermal systems insulation, Fibrous, Homogenous | /Beige | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : 20% Cellulose,15% Fiberglass,35%Non-Fibrous I | Material | | |

Jorena Padilla – Analyst

Armando Ducoing – Approved By



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Date Received: 06/17/2020

Date Received: 06/17/2020

Project Name: N/A

Project #: 1975

Project Location: 12834 2nd St, Yucaipa, CA 92399

Date Reported: 06/20/2020

Date Reported: 06/20/2020

Collected By: A. Pulsipher

| Client ID | Layer # | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|--------------------------------------------------|-------------|---------------------|----------------------------|
| TSI-2 | 20061713.20.A | 20061713.20 | | |
| Location | : Around Boiler Duct | | Yes | 30% Chrysotile |
| Analyst Description / Color | : Thermal systems insulation,Fibrous,Homogenous/ | Beige | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : 20% Cellulose,15% Fiberglass,35%Non-Fibrous N | /Iaterial | | |
| TSI-3 | 20061713.21.A | 20061713.21 | | |
| Location | : Around Boiler Duct | | Yes | 30% Chrysotile |
| Analyst Description / Color | : Thermal systems insulation,Fibrous,Homogenous/ | Beige | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : 20% Cellulose,15% Fiberglass,35%Non-Fibrous M | /aterial | | |
| CT-1 | 20061713.22.A | 20061713.22 | | |
| Location | : Side Room | | No | None Detected |
| Analyst Description / Color | : Ceiling Tile,Firm,Homogenous/Brown,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,40%Non-Fibrous Material,45%Wo | ood Pulp | | |
| CT-2 | 20061713.23.A | 20061713.23 | | |
| Location | : Side Room | | No | None Detected |
| Analyst Description / Color | : Ceiling Tile,Firm,Homogenous/Brown,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,40%Non-Fibrous Material,45%Wo | ood Pulp | | |
| CT-3 | 20061713.24.A | 20061713.24 | | |
| Location | : Small Room Near Kitchen | | No | None Detected |
| Analyst Description / Color | : Ceiling Tile,Firm,Homogenous/Brown,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,40%Non-Fibrous Material,45%Wo | ood Pulp | | |

Lorena Radilla - Analyst

Armando Ducoing - Approved By



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

 Client : Magnolia Environmental
 Date Collected: 06/17/2020
 LAB Job #: 20061713

 Address : 885 Mango St. Brea, CA 92821
 Date Received: 06/17/2020
 Project Name: N/A

 Project #: 1975
 Date Analysis : 06/20/2020
 No of Samples: 45

 Project Location : 12834 2nd St, Yucaipa, CA 92399
 Date Reported: 06/20/2020
 Collected By: A. Pulsipher

| Client ID | Layer # Lab ID | | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|---------------------------------------------------|--------------|---------------------|----------------------------|
| CT2-1 | 20061713.25.A | 20061713.25 | | |
| Location | : Living Room | | | None Detected |
| Analyst Description / Color | : Ceiling Tile,Firm,Homogenous/Brown,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,40%Non-Fibrous Material,45%Wo | ood Pulp | | |
| CT2-2 | 20061713.26.A | 20061713.26 | | |
| Location | : Living Room | | No | None Detected |
| Analyst Description / Color | : Ceiling Tile,Firm,Homogenous/Brown,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,40%Non-Fibrous Material,45%Wo | ood Pulp | | |
| CT2-3 | 20061713.27.A | 20061713.27 | | |
| Location | : Living Room | | No | None Detected |
| Analyst Description / Color | : Ceiling Tile,Firm,Homogenous/Brown,White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,40%Non-Fibrous Material,45%Wo | ood Pulp | | |
| R-1 | 20061713.28.Λ | 20061713.28 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roofing Shingle, Firm, Granular, Non-Homogenous | s/Gray,White | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,73%Non-Fibrous Material,12%Qu | artz | | |
| R-2 | 20061713.29.A | 20061713.29 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roofing Shingle,Firm,Granular,Non-Homogenous | s/Gray,White | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,73%Non-Fibrous Material,12%Qu | artz | | |

Lorena Padilla – Analyst

Armando Ducoing – Approved By



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental

Address: 885 Mango St. Brea, CA 92821

Project #: 1975

Date Received: 06/17/2020

Date Received: 06/17/2020

Project Name: N/A

Date Analysis: 06/20/2020

No of Samples: 45

Project Location : 12834 2nd St, Yucaipa, CA 92399 Date Reported: 06/20/2020 Collected By: Λ. Pulsipher

| Client ID | Layer # Lab ID | | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|---------------------------------------------------|--------------|---------------------|----------------------------|
| R-3 | 20061713.30.A | 20061713.30 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roofing Shingle, Firm, Granular, Non-Homogenous | s/Gray,White | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 15% Cellulose,73%Non-Fibrous Material,12%Qu | artz | | |
| I-1 | 20061713.31.A | 20061713.31 | | |
| Location | : Side Room | | No | None Detected |
| Analyst Description / Color | : Insulation,Fibrous,Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 10% Cellulose,60% Fiberglass,30%Non-Fibrous I | Material | | |
| I-2 | 20061713.32.A | 20061713.32 | | |
| Location | : Side Room | | No | None Detected |
| Analyst Description / Color | : Insulation,Fibrous,Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 10% Cellulose,60% Fiberglass,30%Non-Fibrous | Material | | |
| I-3 | 20061713.33.Л | 20061713.33 | | |
| Location | : Small Room Near Kitchen | | No | None Detected |
| Analyst Description / Color | : Insulation,Fibrous,Homogenous/White | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 10% Cellulose,60% Fiberglass,30%Non-Fibrous l | Material | | |
| F2-1 | 20061713.34.A | 20061713.34 | | |
| Location | : Small Room Near Kitchen | | Yes | 2% Chrysotile |
| Analyst Description / Color | : Floor Tile,Firm,Homogenous/Brown | | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : 15% Cellulose,63%Non-Fibrous Material,20%Bir | nders | | |

Lorena Padilla – Analyst

Armando Ducoing – Approved By



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

 Client : Magnolia Environmental
 Date Collected: 06/17/2020
 LAB Job #: 20061713

 Address : 885 Mango St. Brea, CA 92821
 Date Received: 06/17/2020
 Project Name: N/A

 Project #: 1975
 Date Analysis : 06/20/2020
 No of Samples: 45

 Project Location : 12834 2nd St, Yucaipa, CA 92399
 Date Reported: 06/20/2020
 Collected By: A. Pulsipher

Client ID Lab ID Asbestos Total Est.% of Layer # Present Asbestos F2-1 20061713.34.B 20061713.34 : Small Room Near Kitchen Location 5% Chrysotile Yes Analyst Description / Color : Mastic, Soft, Homogenous/Black Asbestos % Type : Chrysotile Other Material Type : 12% Cellulose,63%Non-Fibrous Material,20%Asphaltic Matrix 20061713.35.A F2-2 20061713.35 : Small Room Near Kitchen 2% Chrysotile Yes Location Analyst Description / Color : Floor Tile, Firm, Homogenous/Brown Asbestos % Type : 15% Cellulose,63%Non-Fibrous Material,20%Binders Other Material Type F2-3 20061713.36.A 20061713.36 : Small Room Near Kitchen Yes 2% Chrysotile Location Analyst Description / Color : Floor Tile, Firm, Homogenous/Brown Asbestos % Type : 15% Cellulose,63%Non-Fibrous Material,20%Binders Other Material Type PM-1 20061713.37.А 20061713.37 None Detected Location : Roof Nο Analyst Description / Color : Roof Mastic, Firm, Homogenous/Black Asbestos % Type Other Material Type : 12% Cellulose,73%Non-Fibrous Material,15%Asphaltic Matrix PM-2 20061713.38.A 20061713.38 Location None Detected No Analyst Description / Color : Roof Mastic,Firm,Homogenous/Black Asbestos % Type : NON Other Material Type : 12% Cellulose,73%Non-Fibrous Material,15%Asphaltic Matrix

Lorena Padilla – Analyst

Armando Ducoing – Approved By

The analysis of the samples in this report were performed and analyzed in accordance with the procedure outlined in the US Federal Register 40 CFR 763, Subpart F, Appendix A; EPA-600/R-93/116 (Method for Determination of Asbestos in Building Materials) and EPA - 40 CFR Appendix E to Subpart E of Part 763, (Interim Method of the Determination of Asbestos in Building Materials) and EPA - 40 CFR Appendix E to Subpart E of Part 763, (Interim Method of the Determination of Asbestos in Building Materials) and EPA - 40 CFR Appendix E to Subpart E of Part 763, (Interim Method of the Determination of Asbestos in Build Insulation Samples). Total percentage of sample constituents may total greater than 100 due to trace amounts. The limit of detection for this analytical method is less than one percent). Samples were analyzed using Calibrated Visual Estimations (CVES); therefore, results may not be reliable for samples of low asbestos concentration levels. In multilayer samples, unless otherwise specified, the asbestos concentration is reported for the layer where asbestos is found. These results lie within the statistical limits of variability calculated for standard reference samples routinely analyzed in the laboratory. On a per sample basis, the accuracy and precision of the results depend on the type of sample and its asbestos content. Ecologics Lab is accredited under the NIST/NVLAP program for asbestos in bulk material for asbestos analysis. Ecologics Lab and its personnel shall not be liable for any misinformation provided to us by the client regarding these samples or for any misuse or interpretation of information supplied by us. Liability shall extend to providing replicate analysis only. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Ecologics Lab will retain samples for a period of three months unless otherwise specified. This report relates only to samples submitted and analyzed. This report may not b



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

 Client : Magnolia Environmental
 Date Collected: 06/17/2020
 LAB Job #: 20061713

 Address : 885 Mango St. Brea, CA 92821
 Date Received: 06/17/2020
 Project Name: N/A

 Project #: 1975
 Date Analysis : 06/20/2020
 No of Samples: 45

 Project Location : 12834 2nd St, Yucaipa, CA 92399
 Date Reported: 06/20/2020
 Collected By: A. Pulsipher

| Client ID | Layer # | Lab ID | Asbestos Present | Total Est.% of Asbestos |
|-----------------------------|-----------------------------------------------|----------------|---------------------|----------------------------|
| PM-3 | 20061713.39.A | 20061713.39 | | |
| Location | : Roof | | | None Detected |
| Analyst Description / Color | : Roof Mastic,Firm,Homogenous/Black | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 12% Cellulose,73%Non-Fibrous Material,15%As | phaltic Matrix | | |
| R2-1 | 20061713.40.A | 20061713.40 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roofing,Granular,Homogenous/Black | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 12% Cellulose,73%Non-Fibrous Material,15%Qu | artz | | |
| R2-2 | 20061713.41.A | 20061713.41 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roofing, Granular, Homogenous/Black | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 12% Cellulose,73%Non-Fibrous Material,15%Qu | artz | | |
| R2-3 | 20061713.42.Λ | 20061713.42 | | |
| Location | : Roof | | No | None Detected |
| Analyst Description / Color | : Roofing,Granular,Homogenous/Black | | | |
| Asbestos % Type | : NON | | | |
| Other Material Type | : 12% Cellulose,73%Non-Fibrous Material,15%Qu | artz | | |
| PB-1 | 20061713.43.A | 20061713.43 | | |
| Location | : Basement | | Yes | 40% Chrysotile |
| Analyst Description / Color | : Particle Board,Fibrous,Homogenous/Gray | | | |
| Asbestos % Type | : Chrysotile | | | |
| Other Material Type | : 15% Cellulose,12% Fiberglass,33%Non-Fibrous | Material | | |

Lorena Padilla – Analyst

Armando Ducoing – Approved By



1012 Segovia Circle, Placentia, CA 92870 Phone (714)632-8118 Fax (714)632-8111 NVLAP Lab Code:600190-0

PLM Bulk Asbestos Report

Client: Magnolia Environmental Date Collected: 06/17/2020 LAB Job #: 20061713 Address: 885 Mango St. Brea, CA 92821 Date Received: 06/17/2020 Project Name: N/A Project #: 1975 Date Analysis: 06/20/2020 No of Samples: 45 Project Location: 12834 2nd St, Yucaipa, CA 92399 Date Reported: 06/20/2020 Collected By: A. Pulsipher

| Client ID | Client ID Layer # | | Asbestos Present | Total Est.% of Asbestos |
|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------|----------------------------|
| PB-2 | 20061713.44.A | 20061713.44 | | |
| Location Analyst Description / Color Asbestos % Type Other Material Type | : Basement : Particle Board, Fibrous, Homogenous/Gray : Chrysotile : 15% Cellulose, 12% Fiberglass, 33% Non-Fibrous M | Yes | 40% Chrysotile | |
| PB-3 Location Analyst Description / Color Asbestos % Type Other Material Type | 20061713.45.A : Basement : Particle Board,Fibrous,Homogenous/Gray : Chrysotile : 15% Cellulose,12% Fiberglass,33%Non-Fibrous N | 20061713.45 Material | Yes | 40% Chrysotile |

Corena



CHAIN OF CUSTODY



1012 Segovia Circle, Placentia, CA 92870 Ph. (714) 632 8100 Fx. (714) 632 8111

| Company: N | CONTACT INFORMATI | ON * | | | PR | OJECT | INFOR | OITAN | N * | | |
|---------------------------------------------------------------------|----------------------------------|-----------------|--------------|------------------------|---------------------|---------------------------------------|--------------------------|------------|---------|----------------------|-------|
| | Magnolia Environmental,LL | .C | Project | | 975 | | | | | | |
| | 5 Mango St. Brea,CA | | Project | | | | | | | | |
| Phone: 562- | | | Project | locatio | | 834 | | 54. | | | |
| Contact: Andrea Pulsipher Email results to: Maglabresults@gmail.com | | | | = Yucaifn, CA 42349 | | | | | | | |
| Email result | s to: Magiabresuits@gmai | I.COM | Date sa | | | 117/20 | | | | | |
| | ASBESTOS | | Sample | a by: | H- Y | MICH | ROBIO | OGY | | | |
| ☑ PIM Bul | lk Analysis (EPA 600/R-93/ | (116) | Fun | gi: Nor | Viable | | | | | | |
| 7 | 000 Point Count (<0.1%) | 110/ | | - | | | TL, B, S | w) | | | |
| | 0 Point Count (<0.25%) | | | - | | | | | Exam (T | L, B, Sw |) |
| Gravime | etric Point Pount (<0.1%) | | ☐ Bac | teria: 1 | otal Co | liform, | E. coli (| P/A) | | | |
| PCM Air | rborne Fiber Count (NIOSH | 7400) | ☐ Bac | teria: 1 | otal Co | liform, | E. coli, | Enteroc | occus (| P/A) | |
| PCM Air | rborne Fiber Count with T\ | NA | ☐ Car | bon Bla | ack & N | laterial | Science | Analys | is | | |
| Other: | | | | | | | | | | | |
| Turnaround | time (TAT) *: 3-4 Hrs | 6-8 Hrs | 24 Hrs | 48 Hrs | X 72 | 2 Hrs | Othe | r: | | | |
| | nformation/ Special instru | | | | | | | | | | |
| | 1st positive on samples gr | | | | | | | | | | |
| | site 1 wall system sample i | f found to be g | reat than or | equal 1 | .%. | | | | | | |
| Other: | | | | | | | | | | | |
| | CAMPIE ID LOCATION * DESCRIPTION | | | A | CDECT | 20 | | ALCOOL | DIOLOG | aver ve | |
| SAMPLE ID | LOCATION * | DESCRI | PTION * | - | SBEST | | The second second second | | | GY/PCN | |
| SAMPLE ID | LOCATION * | DESCRI | PTION * | COND | LOTY | OS FRIABLE Y/N | The second second second | ME STOP | | SY/PCN OW STOP | TOTAL |
| SAMPLE ID | buse and | | PTION* | - | QTY | FRIABLE | TI | ME | FL | OW | |
| | | | | COND | QTY SF/LF | FRIABLE Y/N | TI | ME | FL | OW | |
| W5-1 | | | | COND | QTY SF/LF | FRIABLE Y/N | TI | ME | FL | OW | |
| W5-1 W5-2 | | | | G- | SF/LF | FRIABLE Y/N | TI | ME | FL | OW | |
| W5-1 W5-2 W5-3 | | WALL | 51800 | G- | SF/LF 320 | FRIABLE Y/N | TI | ME | FL | OW | |
| W5-1 W5-2 W5-3 JU-1 | | WALL | 51800 | G- | SF/LF 320 | FRIABLE Y/N | TI | ME | FL | OW | |
| W5-1 W5-2 W5-3 JU-1 JU-2 | | WALL | STEM | G- | 977 5F/LF 320 | PRIABLE Y/N N N N N | TI | ME | FL | OW | |
| W5-1 W5-2 W5-3 JU-1 JU-3 | buseaunt | Joint | STEM | COND G- | 977 5F/LF 320 | FRIABLE Y/N N U | TI | ME | FL | OW | |
| W5-1 W5-2 W5-3 JU-1 JU-3 P-1 | Buse nent | Joint | STEM | COND G- | 977 5F/LF 320 | FRIABLE Y/N N U | TI | ME | FL | OW | |
| W5-1 W5-2 W5-3 JU-1 JU-2 JU-3 P-1 | Buse nent Hayl Bed 1 Livs for | Joint Plass | Company | COND G- | 977 5F/LF 320 | PRIABLE Y/N N N N N N | STAR | ME | STAR | OW | |
| W5-1 W5-2 W5-3 JU-1 JU-2 JU-3 P-1 | Buse nent Hayi Bed 1 Livs for | Joins | Company | COND G- G- G- | 077 55/LF 320 | N N N N N N N N N N N N N N N N N N N | STAR | ME | STAR | STOP | |

 $\textbf{COND:} \ \, \textbf{Conditions:} \ \, \textbf{G} = \textbf{Good;} \ \, \textbf{D} = \textbf{Damage;} \ \, \textbf{SD} = \textbf{Significantly Damage.}$

Page 1 of 3

^{*} Necessary information for processing.

ST: Spore Trap, TL: Tape Lift, B: Bulk, Sw: Swab, P/A: Presence/ Absence, QTY: Quantity, SF: Square Foot, LF: Length Foot,



CHAIN OF CUSTODY

1012 Segovia Circle, Placentia, CA 92870 Ph. (714) 632 8100 Fx. (714) 632 8111



| Company: | Magnovia | Proj | ect #: | | 975 | | | wagiona i | LIVIIOIIIIG | Ital |
|-----------|-----------------------------------|----------------------------|-----------|-----------------|------------------|------|------|-------------|-------------|-------|
| | AMPLE ID LOCATION * DESCRIPTION * | | ASBESTOS | | MICROBIOLOGY/PCM | | | | | |
| SAMPLE ID | | | COND | QTY SF/LF | FRIABLE Y/N | STAR | ME | FLO STAR | STOP | TOTAL |
| F-1 | Kitary | Lyland Sheet Flooring | G- | 378 | N | SIAN | 3100 | SIAR | 3109 | |
| F-2 | l |) | 1 | 1 | | | | | | |
| F-3 | Ste Room | V | V | V | 1 | | | | | |
| 5-1 | basemen Bath | Stucco | 0 | 20 | N | | | | | |
| 5-2 | | | 1 | 1 | 1 | | | | | |
| 5-3 | | <u> </u> | | 1 | V | | | | | |
| WP-1 | Exteren wholes | Winder lutty | 0 | 25 | Y | | | | | |
| WP-2 | | | 1 | | | | | | | |
| WP-3 | | · · | 1 | | | | | | | |
| T51-1 | Around boiler duct | Thermal System Instruction | G | 40 ⁵ | N | | | | | |
| TS1-2 | 1 | 1 | 1 | | 1 | | | | | |
| T51-3 | V | J | | | J | | | | | |
| CT-1 | side coom | 12x12 cos da | 0 | 200 | Y | | | | | |
| CT-2 | V | 1 | | | 1 | | | | | |
| CT-3 | Smil Room new weenen | V | \bigvee | 1 | \downarrow | | | | | |
| CT2-1 | LNO DOON | 1224 snoon city the | 6 | 247 | N | | | | | |
| CT2-6 | 1 | . \ | 1 | | | | | | | |
| CT2-3 | | V | 1 | 1 | u | | | | | |

^{*} Necessary information for processing.

ST: Spore Trap, TL: Tape Lift, B: Bulk, Sw: Swab, P/A: Presence/ Absence, QTY: Quantity, SF: Square Foot, LF: Length Foot, COND: Conditions: G = Good; D = Damage; SD = Significantly Damage.

Magnolia



Company:

CHAIN OF CUSTODY

1012 Segovia Circle, Placentia, CA 92870 Ph. (714) 632 8100 Fx. (714) 632 8111

Project #:

1975



ASBESTOS MICROBIOLOGY/PCM SAMPLE ID **LOCATION* DESCRIPTION** * QTY FRIABLE FLOW COND TOTAL SF/LF Y/N STAR STOP STAR STOP G= N 1000 Roof Shinsha Rooking R-2 V 12-3 6 I-1 Fagua-van 400 N Sole Roan I-Z V I-3 0 gual loss year whom F2-1 6 129 Floor The 50 N Small Loom new Work F2-2 V F2-3 1-Wg N R006 6 15 Perevoria masce PM-2 V PM-> Roef N Rolled noosis 6 R2-1 300 1-2-2 V 12-3 25 N 6 80-1 Baseney Purcele Board 80-2 96-7

ST: Spore Trap, TL: Tape Lift, B: Bulk, Sw: Swab, P/A: Presence/ Absence, QTY: Quantity, SF: Square Foot, LF: Length Foot, COND: Conditions: G = Good; D = Damage; SD = Significantly Damage.

^{*} Necessary information for processing.

Page 23 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399 Date of Survey: June 17, 2020 Project Number: 1975

APPENDIX B **SITE PHOTOGRAPHS**



Page 24 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975



Picture 1: Roofing of the subject property was found to not contain asbestos



Picture 2: Penetration mastic sampled from the roof



Picture 3: Thermal system insulation around the boiler duct was found to be ACM



Picture 4: Insulation was found to not contain asbestos



Page 25 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399


Date of Survey: June 17, 2020 Project Number: 1975



Picture 5: Exterior stucco was found to not contain asbestos



Picture 6: Wall system was found to not contain asbestos

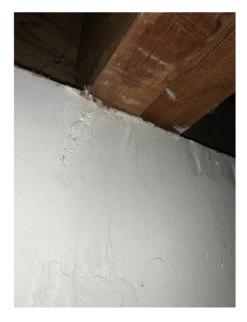

Picture 7: Joint compound was found to not contain asbestos




Picture 8: Damaged ceiling tile was found to not contain asbestos



Page 26 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975

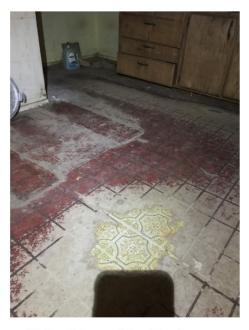

Picture 9: Layered sheet flooring sampled from the kitchen was found to be ACM



Picture 11: Plaster sampled was found to not contain asbestos



Picture 10: Particle board sampled was found to be ACM



Page 27 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399 Date of Survey: June 17, 2020 Project Number: 1975

APPENDIX C

SITE MAPS/SKETCH



Page 28 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399

Date of Survey: June 17, 2020 Project Number: 1975


Sketch not to scale.

Sample ID indicates location of sampling.

Basement

| JC-2 WS-1 PB-1 PB-2 | S-1 Basement Bathroon S-2 PB-3 S-3 | |
|---------------------------|------------------------------------|--------------|
| TSI-2 TSI-1 TSI-2 | | WS-3 JC-3 |
| | Stairs | JC-3 WS-2 |

WP-2

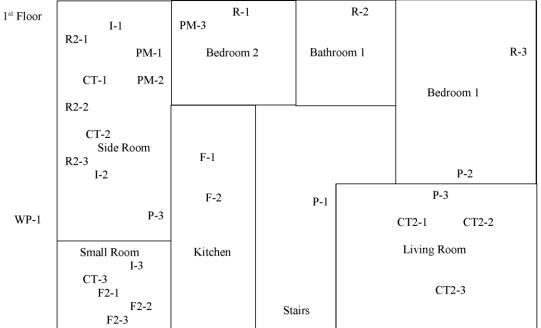

WP-3

Page 29 of 30

Property Address: 12834 2nd St. Yucaipa, CA 92399 Date of Survey: June 17, 2020 Project Number: 1975

APPENDIX D

ACCREDITATION AND CERTIFICATION